




  
**fumagalli**<sup>®</sup>  
s i n c e 1 9 7 3

MADE IN  
ITALY



# TOP SELECTION PROJECT 2024



WARM Light    DAY Light    COLD Light  
**KELVIN SETTABLE LAMP**




**NOEMI**

PAG 12



**SILOE**

PAG 12

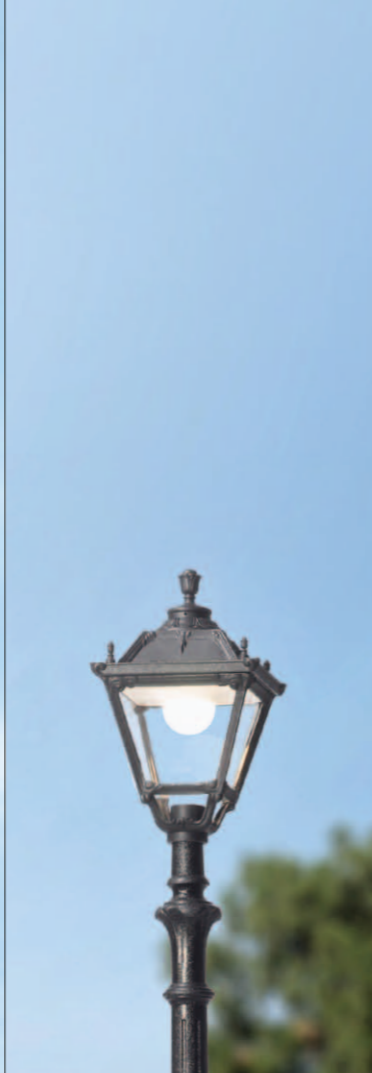

**TOBIA**

PAG 14



**SIMON**

PAG 14



**ELIA**

PAG 18



**PIETRO**

PAG 18



**GLOBE**

PAG 22



**CLASSIC RANGE**

# E27 HIGH POWER LED

CLASSIC RANGE



## E27 HIGH POWER LED

**SILICONE PROTECTION DRIVER**

**INDOOR & OUTDOOR USE**

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

4000K 3620lm | 3000K 3325lm

30W | 100-240V

**CE**  
**CB**

LVD | EMC | ERP

**IECEE**  
CB  
SCHEME

for details see pag. 59

Ø100 | Ø100

15W 1690 lm | CCT SET | 30W 3620 lm

**CCT SETTABLE**

3000 K | 4000 K

SDCM <6

Ø118 | Ø138

50W 6550 lm | 60W 7600 lm

E35.201.R20.Q1K



3070

**NEW VERSION  
HIGH POWER LED**

NEBO/OFIR  
NOEMI 2L  
for details see pag. 12



Q43.207.H1L

4180

HOREB/ELIA  
for details see pag. 18

NEBO/TOBIA  
for details see pag. 14



Q33.201.Q1K

3000



OFIR/NOEMI  
for details see pag. 12



U33.113.Q1K

LOT/SIMON  
for details see pag. 14




E35.132.Q1K

ADVANTAGES



ANTI CORROSION


NO MAINTENANCE




UV-RAYS STABILIZED



DOUBLE INSULATION





NOT AFFECTED BY CHEMICAL FERTILIZES





FULLY MODULAR Ø60mm

**RESIN POST OF A SINGLE PIECE WITHOUT JOINTS**

Stronger, safer and more durable

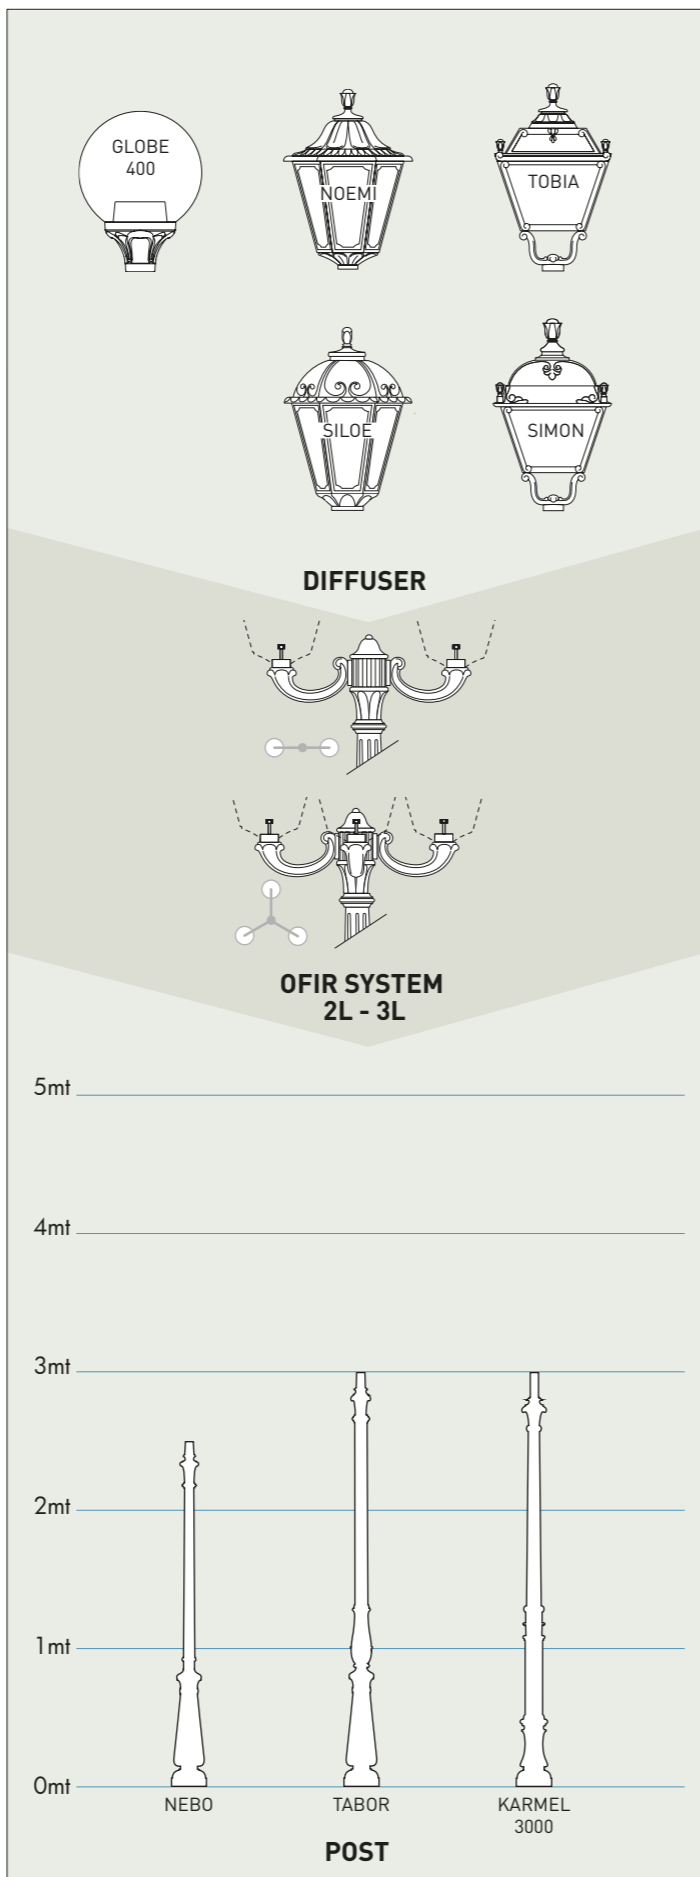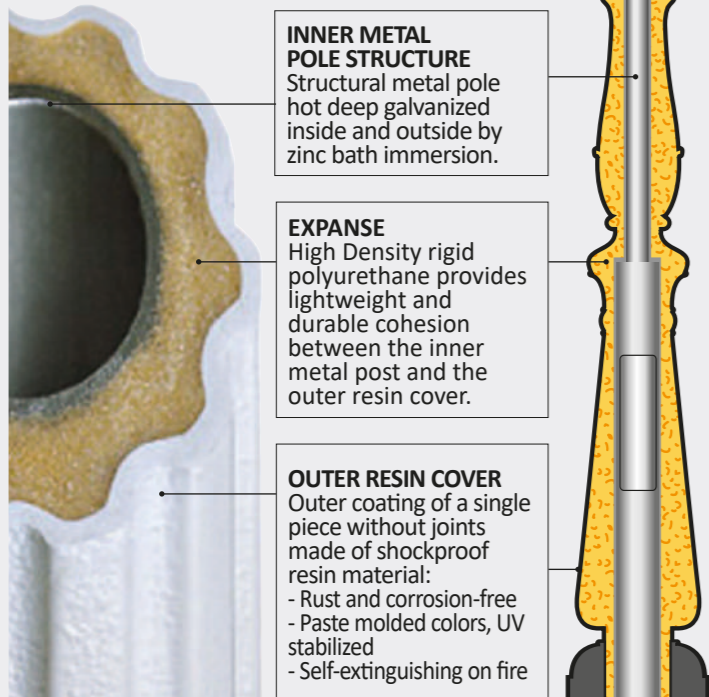

SUGGESTED COMBINATIONS

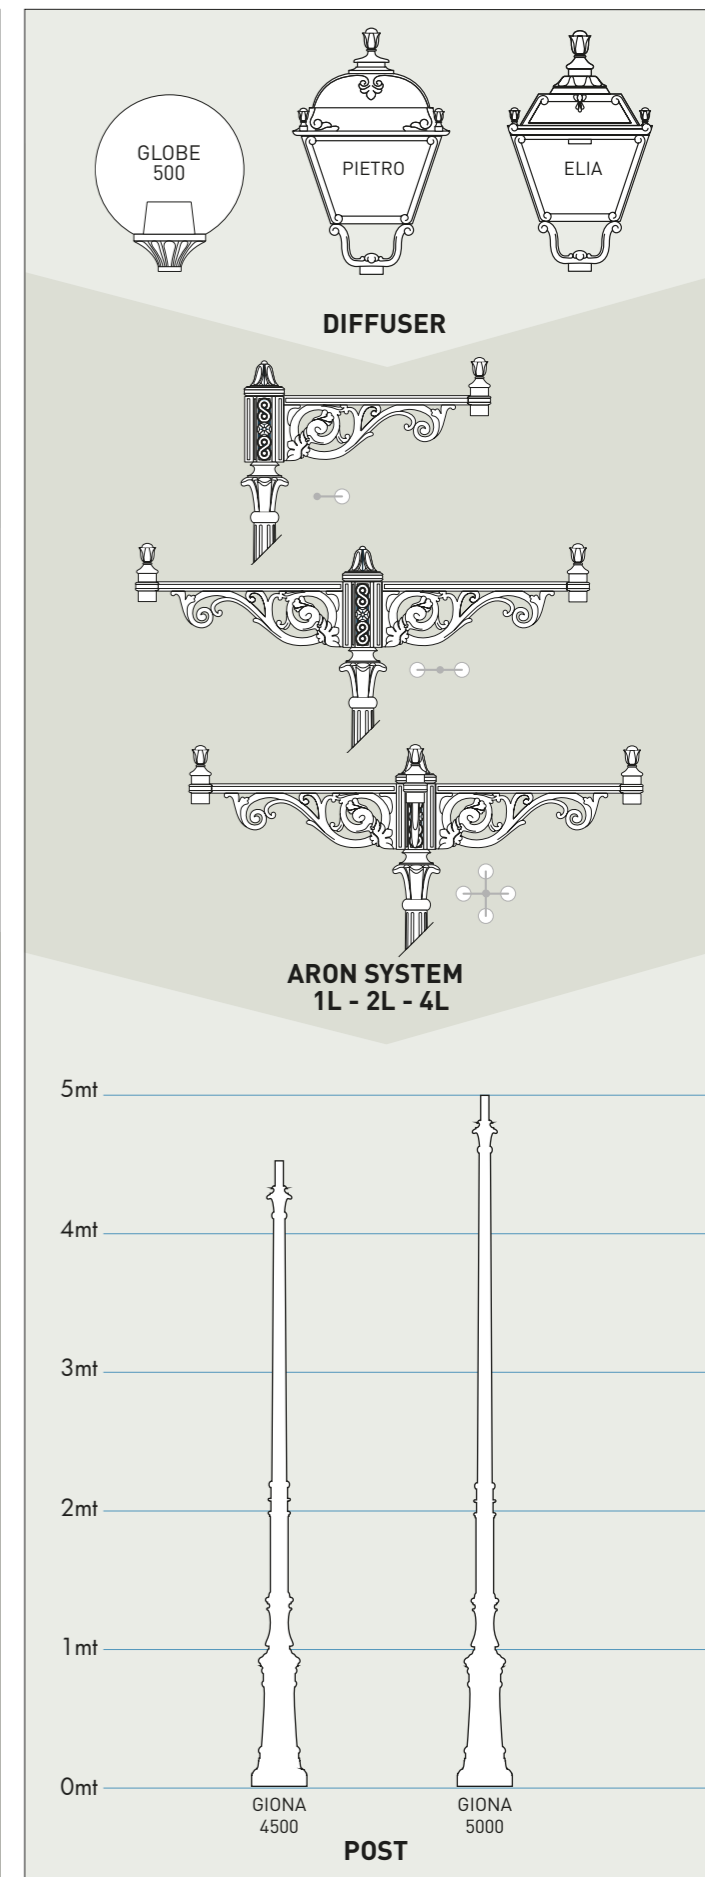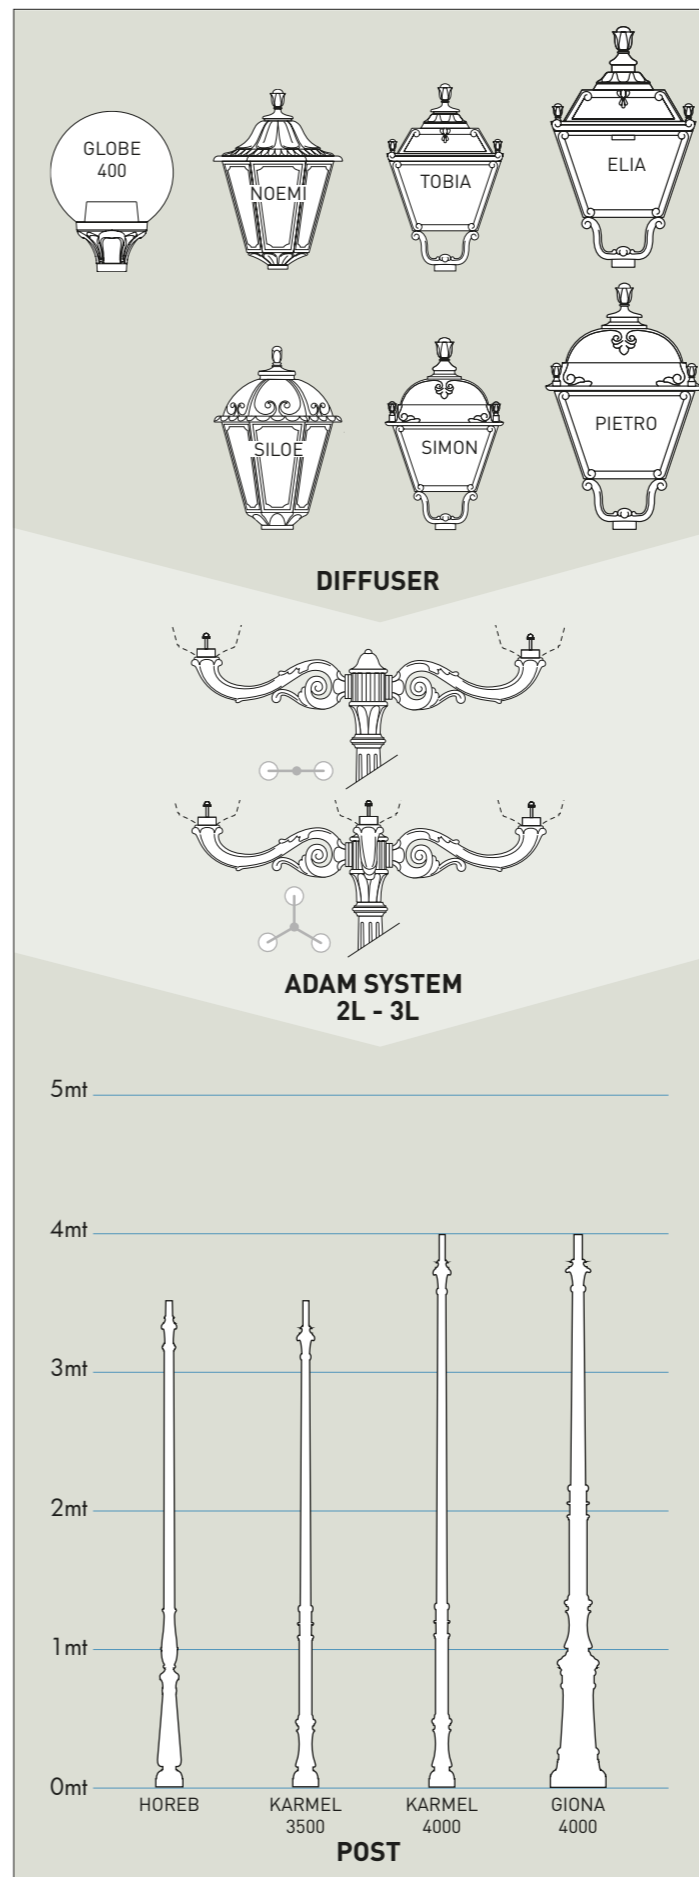

# NOEMI/SILOE HIGH POWER LED CLASSIC RANGE



MADE IN ITALY



E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C  
-30°C



90% HUMIDITY



VOLTAGE SURGE RESISTANT

30W (3620 lm)  
50W (6550 lm)

More details at page 59



NOEMI-SILOE 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K <b>CCT SET</b>	NOEMI-SILOE =  70W Hqi-Son

NOEMI-SILOE 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	NOEMI-SILOE =  100W Hqi-Son



## NOEMI

30W LED	<b>CCT SET</b>	E35.000.Q1K
50W LED	4000K 3000K	E35.000.H1L E35.000.H1R



## SILOE

30W LED	<b>CCT SET</b>	K35.000.Q1K
50W LED	4000K 3000K	K35.000.H1L K35.000.H1R

# TOBIA/SIMON HIGH POWER LED CLASSIC RANGE



MADE IN ITALY



E27 HIGH POWER LED

INDOOR & OUTDOOR USE



+80°C  
-30°C



90% HUMIDITY



VOLTAGE SURGE RESISTANT

30W (3620 lm)  
50W (6550 lm)

More details at page 59

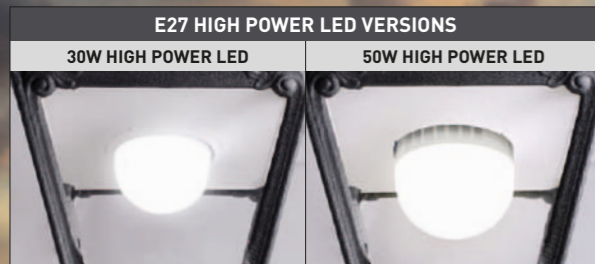


TOBIA-SIMON 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K <b>CCT SET</b>	TOBIA-SIMON =  70W Hqi-Son

TOBIA-SIMON 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	TOBIA-SIMON =  100W Hqi-Son




TOBIA

30W LED	<b>CCT SET</b>	Q33.000.Q1K
50W LED	4000K 3000K	Q33.000.H1L Q33.000.H1R



SIMON

30W LED	<b>CCT SET</b>	U33.000.Q1K
50W LED	4000K 3000K	U33.000.H1L U33.000.H1R



MADE IN ITALY

# TOBIA/SIMON GX53 LED

CLASSIC RANGE



MADE IN ITALY



**FLAT  
DIFFUSER**

**GX53 LED VERSION**  
4x GX53

**CCT SETTABLE**  
3000 K 4000 K 6500 K  
SDCM <6

**AVAILABLE COLORS**

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



TOBIA-SIMON 40W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W <b>40W</b>	<b>5160 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	<b>100W</b> HQI-SON

**TOBIA**

LAMP INCLUDED: 4x GX53 LED

**CCT SET LED** 4x10W **40W** Q35.000.D4K

FLAT DIFFUSER FOR GX53 LED VERSION

**NEW VERSION  
CCT SETTABLE LAMP**

**SIMON**

LAMP INCLUDED: 4x GX53 LED

**CCT SET LED** 4x10W **40W** U35.000.D4K


FLAT DIFFUSER FOR GX53 LED VERSION

**NEW VERSION  
CCT SETTABLE LAMP**

MADE IN ITALY



# ELIA/PIETRO HIGH POWER LED CLASSIC RANGE

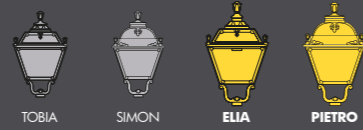

MADE IN ITALY

**NEW VERSION  
HIGH POWER LED**

NEW HIGH POWER LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°C  
90% HUMIDITY


VOLTAGE SURGE  
RESISTANT

**50W (6550 lm)**  
**60W (7600 lm)**

More details at page 59



AVAILABLE COLORS			
RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ELIA/PIETRO 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	<b>50W</b>	<b>6550 lm</b>	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 70W HQI-SON


ELIA/PIETRO 60W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 138	<b>60W</b>	<b>7600 lm</b>	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 100W HQI-SON



## ELIA




<b>50W</b>	4000K	Q43.000.H1L
	3000K	Q43.000.H1R
<b>60W</b>	4000K	Q43.000.W1L
	3000K	Q43.000.W1R

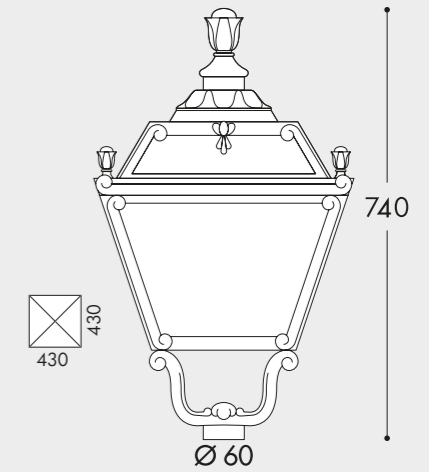

## PIETRO



<b>50W</b>	4000K	U43.000.H1L
	3000K	U43.000.H1R
<b>60W</b>	4000K	U43.000.W1L
	3000K	U43.000.W1R

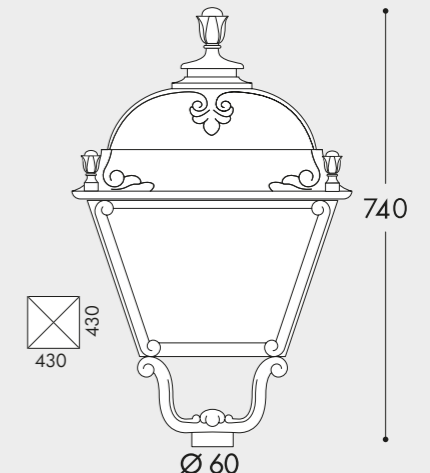

MADE IN ITALY

# ELIA/PIETRO GX53 LED

## CLASSIC RANGE



MADE IN ITALY



**GX53 LED VERSION**  
8x GX53 LED

**CCT SETTABLE**  
3000 K 4000 K 6500 K  
SDCM <6

**AVAILABLE COLORS**

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ELIA/PIETRO 80W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	8x10W <b>80W</b>	<b>10320 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	ELIA-PIETRO 150W

**ELIA**

LAMP INCLUDED: 8x GX53 LED

LED GX53 LAMP INCLUDED CCT SET

8x10W **80W** Q45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

**NEW VERSION CCT SETTABLE LAMP**

**PIETRO**

LAMP INCLUDED: 8x GX53 LED

LED GX53 LAMP INCLUDED CCT SET

8x10W **80W** U45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

**NEW VERSION CCT SETTABLE LAMP**

MADE IN ITALY

# GLOBE 400/GLOBE 500

CLASSIC RANGE



MADE IN ITALY



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



## GLOBE 400



E27	G40.B40.E27
-----	-------------

ALUMINIUM CHROME LOUVRE

UPWARD .FC1  
DOWNWARD .FC6

## GLOBE 500



E27	G50.B50.E27
E40	G50.B50.E40

ALUMINIUM CHROME LOUVRE

UPWARD .FC1  
DOWNWARD .FC6

E27 VERSION  
SUITABLE FOR  
HQI - SON

MADE IN ITALY

# CLASSIC POLES



**ANTI CORROSION**

**UV-RAYS STABILIZED**

**NO MAINTENANCE**

**DOUBLE INSULATION**

**NOT AFFECTED BY CHEMICAL FERTILIZERS**



EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

NEBO		TABOR		HOREB		KARMEL 3000		KARMEL 3500	
without door	000.201	without door	000.204	without door	000.207	without door	000.231	without door	000.234
with door	000.202	with door	000.205	with door	000.208	with door	000.232	with door	000.235
with door & box	000.203	with door & box	000.206	with door & box	000.209	with door & box	000.233	with door & box	000.236

cage type C  
Ø 275

cage type C  
Ø 275

cage type C  
Ø 275

cage type C  
Ø 275

cage type C  
Ø 275

**AVAILABLE COLORS**  
**MOULDED COLOURS**

BLACK (A)

WHITE (W)

**EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION**

**CAGE - C**

**CAGE - D**

**CAGE - E**

KARMEL 4000		GIONA 4000		GIONA 4500		GIONA 5000	
without door	000.237	without door	000.221	without door	000.224	without door	000.227
with door	000.238	with door	000.222	with door	000.225	with door	000.228
with door & box	000.239	with door & box	000.223	with door & box	000.226	with door & box	000.229

cage type D  
Ø 275

cage type E  
400

cage type E  
400

cage type E  
400


# WALL BRACKETS/BASE



# POST TOP SYSTEMS

## OFIR WALL BRACKET

H.132.WAL



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
GLOBE 400

Ø 60mm




### FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

## OFIR SYSTEM 2L


000.000.R20



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
GLOBE 400

## OFIR SYSTEM 3L


000.000.R30



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
GLOBE 400

## ADAM WALL BRACKET


H.171.WAL



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## LOT BASE


H.113



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## ADAM SYSTEM 2L


000.000.M20

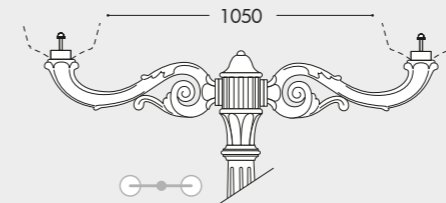

suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## ADAM SYSTEM 3L


000.000.M30

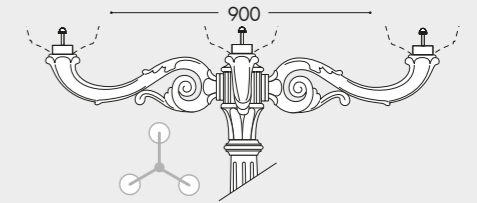

suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## ARON WALL BRACKET


H.172 + H.172.WAL

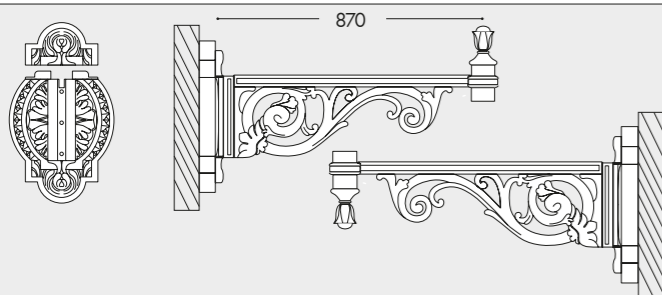

suggested diffuser:  
ELIA - PIETRO  
GLOBE 500

## ARON SYSTEM 1L


000.000.N10



suggested diffuser:  
ELIA - PIETRO  
GLOBE 500

## ARON SYSTEM 2L



000.000.N20

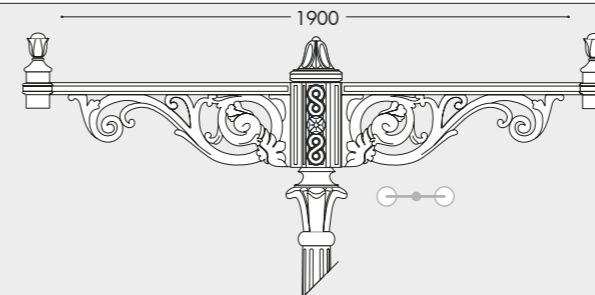

suggested diffuser:  
ELIA - PIETRO  
GLOBE 500

## ARON SYSTEM 4L

000.000.N40

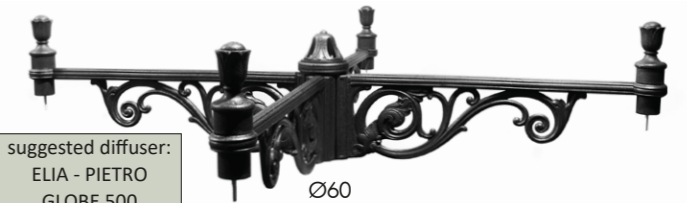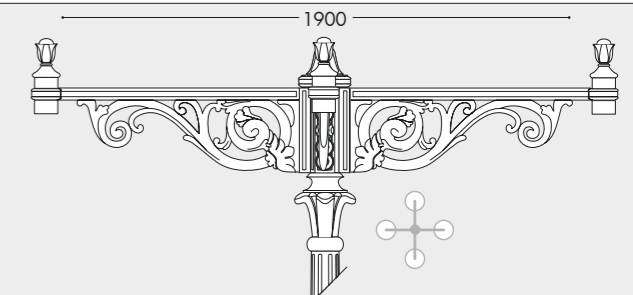

suggested diffuser:  
ELIA - PIETRO  
GLOBE 500



**GIORGIO**

**GINO**

**REMO**

**VIVI**

**ECOVIVI**

**BEPPE**

**ECOBEPPE**

**GLOBE**

GIORGIO PAG 35  
ROSA PAG 35

GINO400 PAG 40  
GINO500 PAG 46

REMO400 PAG 40  
REMO500 PAG 46

VIVI400 PAG 36  
VIVI500 PAG 42

ECOVIVI400 PAG 38  
ECOVIVI500 PAG 44

BEPPE400 PAG 36  
BEPPE500 PAG 42

ECOBEPPE400 PAG 38  
ECOBEPPE500 PAG 44

GLOBE400 PAG 48  
GLOBE500 PAG 48

**MODERN  
RANGE**



# E27 HIGH POWER LED

MODERN RANGE



## E27 HIGH POWER LED

**SILICONE PROTECTION DRIVER**

**INDOOR & OUTDOOR USE**

-30 +80 °C 90% HUMIDITY

**VOLTAGE SURGE RESISTANT**

**TUV SUD** **CE** **CB**

**LVD** **EMC** **ERP**

**IECEE**  
CB  
SCHEME

for details see pag. 59

Ø100      Ø100

**15W** 1690 lm      **30W** 3620 lm

**CCT SET**

**CCT SETTABLE**

3000 K      4000 K

SDCM <6

Ø118      Ø138

**50W** 6550 lm      **60W** 7600 lm




EKTOR 3000  
MIDIPIALAR/  
VIVI 400 1L  
for details see pag. 36

3255

V50.364.A10.H1L

MADE IN ITALY

P50.361.H1L

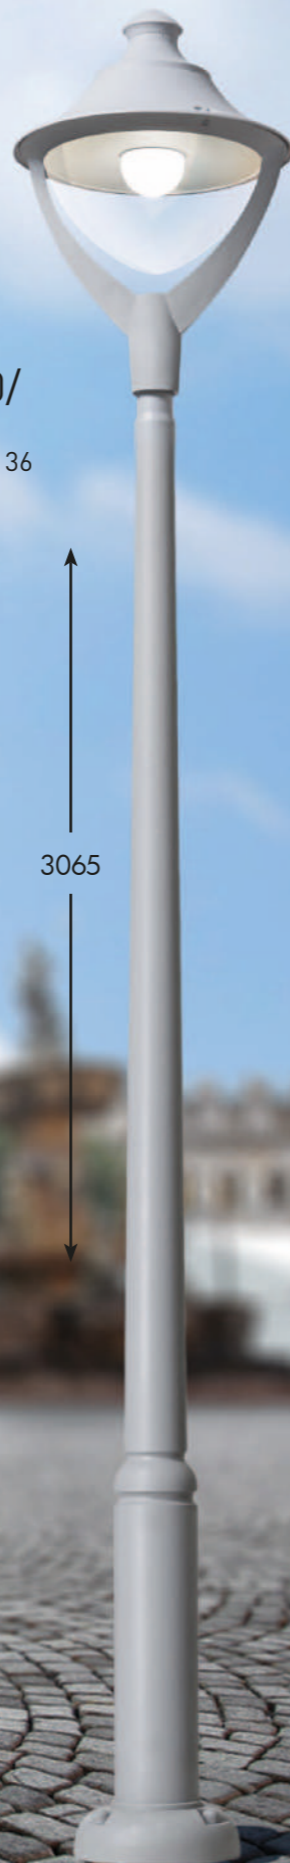

EKTOR 2500/  
BEPPE 400  
for details see pag. 36

3065

EKTOR 2500/  
GIORGIO  
for details see pag. 34



4P2.361.G10.E28

2700



MADE IN ITALY



R50.254.Q1K

MIDIPIALAR/  
REMO 400  
for details see pag. 40



F50.115.Q1K

NEW LOT/  
GINO 400  
for details see pag. 40

MADE IN ITALY



**ADVANTAGES**



**ANTI CORROSION**



**NO MAINTENANCE**




**UV-RAYS STABILIZED**



**DOUBLE INSULATION**






**NOT AFFECTED BY CHEMICAL FERTILIZES**



**FULLY MODULAR Ø60mm**



**SUGGESTED COMBINATIONS**

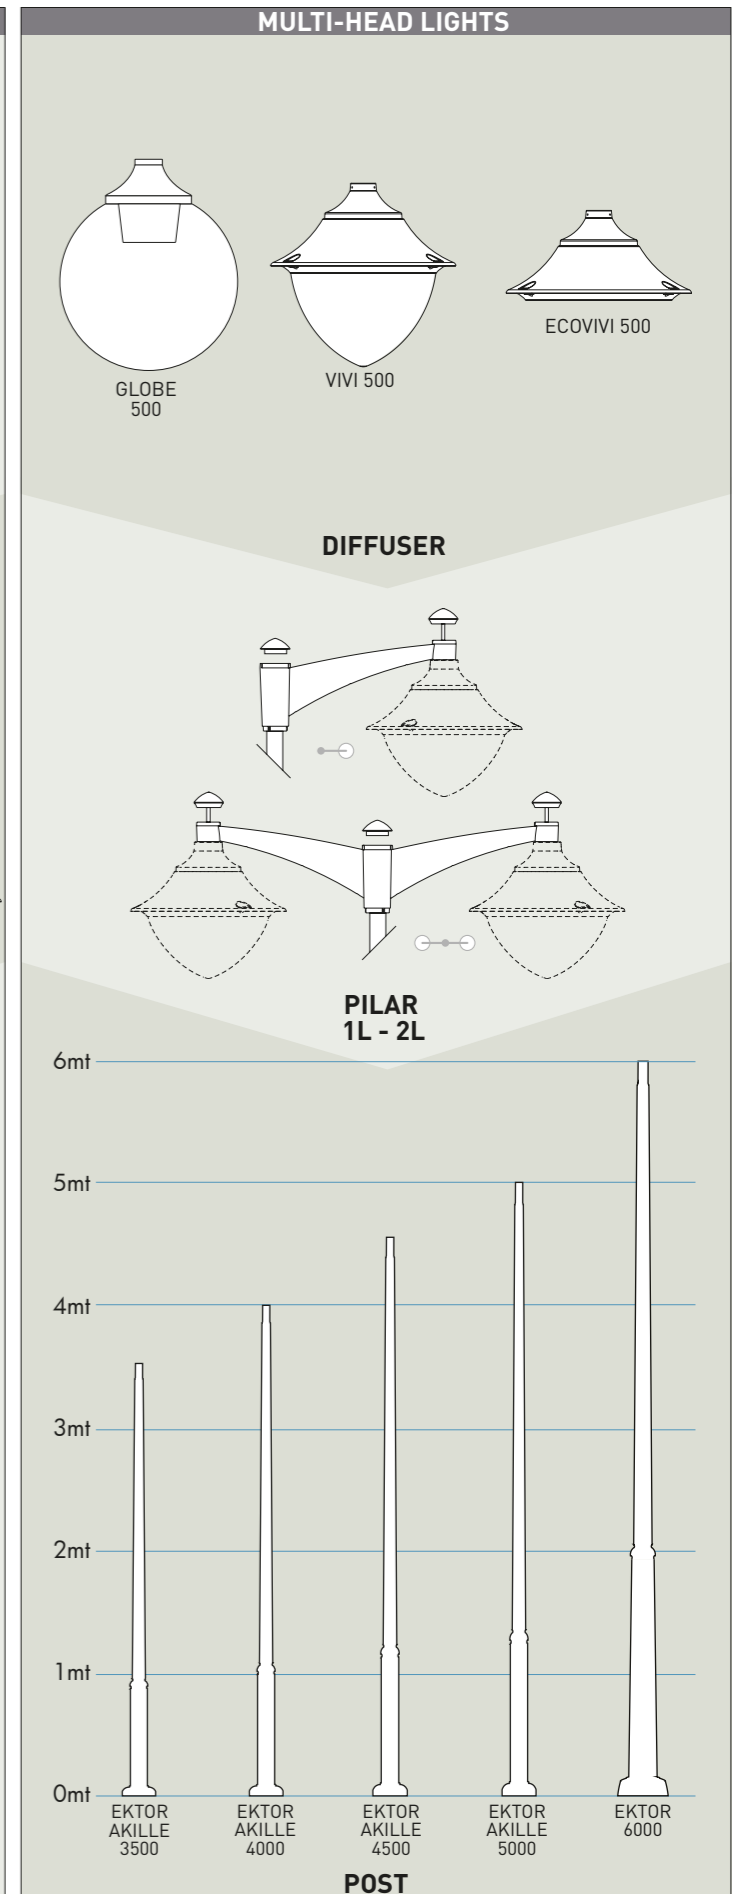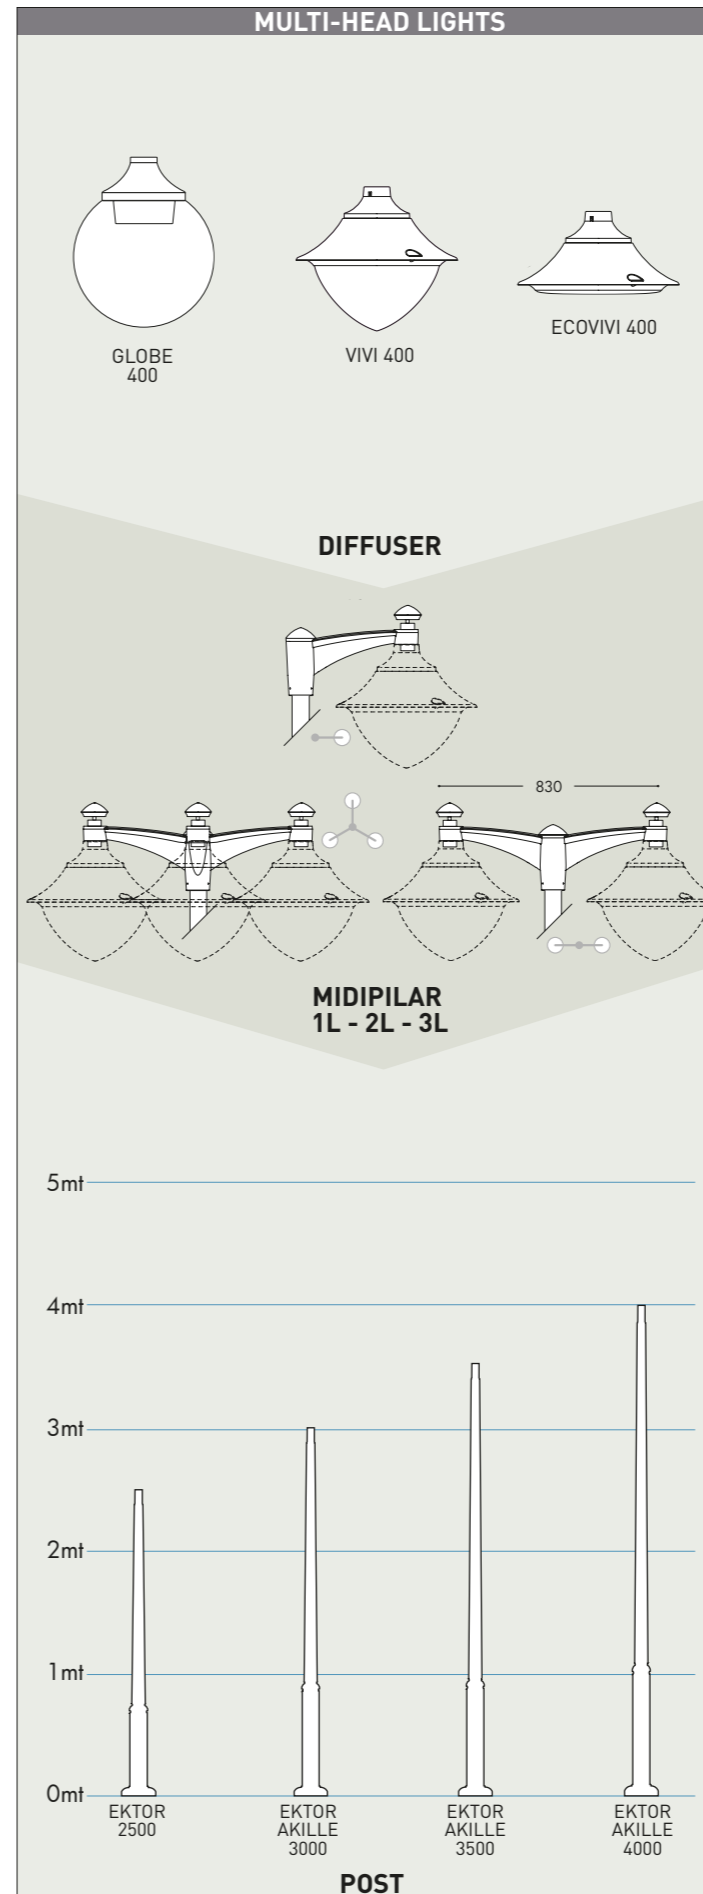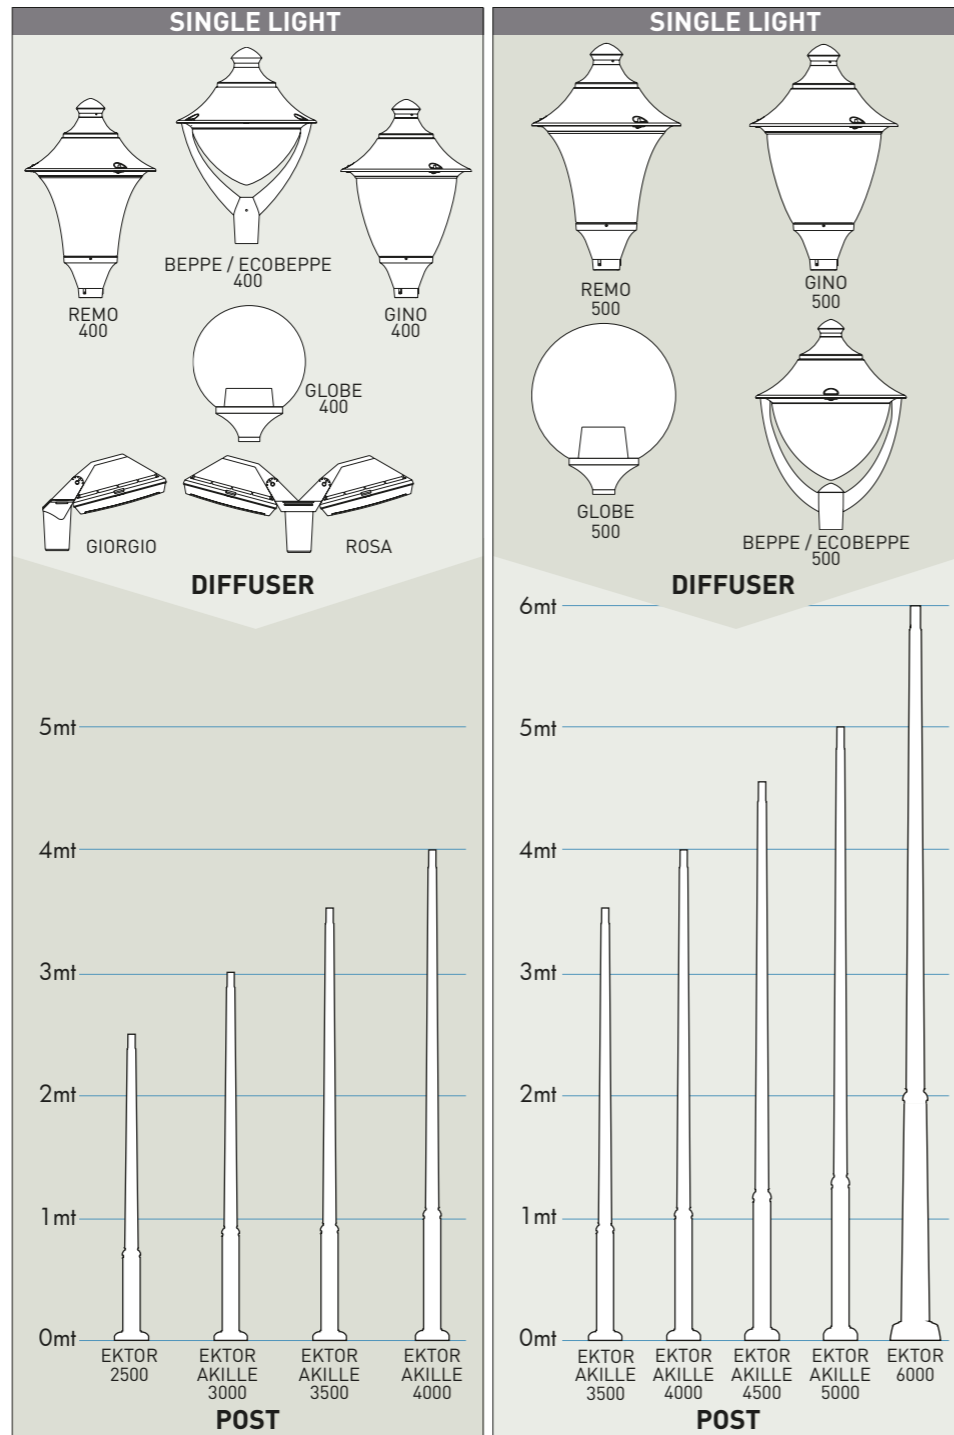


**RESIN POST OF A SINGLE PIECE WITHOUT JOINTS**  
Stronger, safer and more durable

**INNER METAL POLE STRUCTURE**  
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

**EXPANSE**  
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

**OUTER RESIN COVER**  
Outer coating of a single piece without joints made of shockproof resin material:  
- Rust and corrosion-free  
- Paste molded colors, UV stabilized  
- Self-extinguishing on fire



MADE IN ITALY



**CCT SETTABLE**

3000 K 4000 K 6500 K

SDCM <6



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

**AVAILABLE COLORS**

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (L) WHITE (W)

DIFFUSER

OPAL (Y)

**AVAILABLE VERSIONS**

GX53 LED	4x GX53	2x E27
CCT SET	CCT SET	CCT SET
LED GX53	LED GX53	CFL LED

UV UNTREATED ANTI-SHOCK RECYCLABLE CE CB IEC60730 SCHEME IP66 CLASS II DOUBLE INSULATION

GIORGIO/ROSA GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W <b>40W</b>	<b>5160 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	TOBIA-SIMON HQL-SON <b>100W</b>

LED BULKHEAD GX53					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	<b>17W</b>	<b>2350 lm</b>	100-240V 50/60 Hz	6500K/4000K/2700K	<b>150W</b> INCANDESCENT

**GIORGIO** **2xE27**

LAMP INCLUDED: **4x GX53 LED**

**2xE27** 4P2.000.G10.E28

**GX53 17W** CCT SET 4P1.000.G10.E1K

**4x10W 40W** CCT SET 4P2.000.G10.D4K

**NEW VERSION CCT SETTABLE LAMP**

**ROSA** **2xE27**

LAMP INCLUDED: **8x GX53 LED**

**2xE27** 4P2.000.G20.E28

**GX53 36W** CCT SET 4P1.000.G20.E1K

**2x40W 80W** CCT SET 4P2.000.G20.D4K

**NEW VERSION CCT SETTABLE LAMP**

# VIVI/BEPPE 400

MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C  
-30°C

90% HUMIDITY


VOLTAGE SURGE RESISTANT

30W (3620 lm)  
50W (6550 lm)

More details at page 59



RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



VIVI/BEPPE 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K	VIVI-BEPPE 400 HQI-SON 100W

VIVI/BEPPE 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	VIVI-BEPPE 400 HQI-SON 50W
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 400 HQI-SON 70W

**GX53 LED**

LAMP INCLUDED: 6x GX53 LED

**VIVI 400**

30W CCT SET V50.000.Q1K

4000K V50.000.H1L

50W 3000K V50.000.H1R

6x10W 60W CCT SET V50.000.D6K

**HIGH POWER LED**

LAMP INCLUDED: HIGH POWER LED E27

NEW VERSION CCT SETTABLE LAMP

**GX53 LED**

LAMP INCLUDED: 6x GX53 LED

**BEPPE 400**

30W CCT SET P50.000.Q1K

4000K P50.000.H1L

50W 3000K P50.000.H1R

6x10W 60W CCT SET P50.000.D6K

**HIGH POWER LED**


LAMP INCLUDED: HIGH POWER LED E27

NEW VERSION CCT SETTABLE LAMP

MADE IN ITALY

# ECOVIVI/ECOBEPPE 400

MODERN RANGE

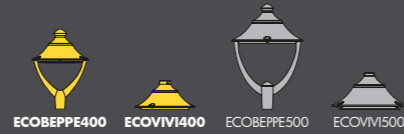

MADE IN ITALY



**CCT SETTABLE**

3000 K 4000 K 6500 K

SDCM <6

**GX53 MODULAR LED LIGHT SYSTEM**



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

**AVAILABLE COLORS**

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)



ECOVIVI/ECOBEPPE 400 42W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x7W <b>42W</b>	<b>5850 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI- ECOBEPPE 400 = <b>70W</b> HQI-SON

ECOVIVI/ECOBEPPE 400 60W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W <b>60W</b>	<b>7740 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI- ECOBEPPE 400 = <b>100W</b> HQI-SON

**GX53 LED** LAMP INCLUDED: 6x GX53 LED

**ECOVIVI 400** **E27** EV4.000.E27

**E40** EV4.000.E40

6x10W **60W** **CCT SET** EV4.000.D6K

**NEW VERSION CCT SETTABLE LAMP**

**E27 VERSION SUITABLE FOR HQI - SON**

**GX53 LED** LAMP INCLUDED: 6x GX53 LED

**ECOBEPPE 400** **E27** EP5.000.E27

**E40** EP5.000.E40

6x10W **60W** **CCT SET** EP5.000.D6K


**NEW VERSION CCT SETTABLE LAMP**

**E27 VERSION SUITABLE FOR HQI - SON**

MADE IN ITALY

# GINO/REMO 400

MODERN RANGE

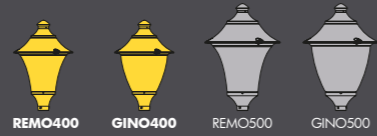

MADE IN ITALY



**NEW VERSION**  
**HIGH POWER LED**

NEW HIGH POWER LED

**INDOOR & OUTDOOR USE**

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

**30W** (3620 lm)  
**50W** (6550 lm)

More details at page 59



AVAILABLE COLORS			DIFFUSER	
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



GINO/REMO 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W <b>60W</b>	<b>7740 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	GINO-REMO 400 <b>100W</b> HQI-SON

GINO/REMO 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	<b>30W</b>	<b>3620 lm</b>	100-240V 50/60 Hz	4000K/3000K <b>CCT SET</b>	GINO-REMO 400 <b>50W</b> HQI-SON
	<b>50W</b>	<b>6550 lm</b>	100-240V 50/60 Hz	4000K 3000K	GINO-REMO 400 <b>70W</b> HQI-SON

**GINO 400**

LAMP INCLUDED: 6x GX53 LED

**30W** CCT SET F50.000.Q1K

4000K F50.000.H1L

**50W** 3000K F50.000.H1R

6x10W **60W** CCT SET F50.000.D6K

**HIGH POWER LED**

LAMP INCLUDED: HIGH POWER LED E27

**NEW VERSION CCT SETTABLE LAMP**

**REMO 400**

LAMP INCLUDED: 6x GX53 LED

**30W** CCT SET R50.000.Q1K

4000K R50.000.H1L

**50W** 3000K R50.000.H1R

6x10W **60W** CCT SET R50.000.D6K

**HIGH POWER LED**

LAMP INCLUDED: HIGH POWER LED E27

**NEW VERSION CCT SETTABLE LAMP**

MADE IN ITALY

# VIVI/BEPPE 500

MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)  
60W (7600 lm)

More details at page 59



AVAILABLE COLORS			DIFFUSER	
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



VIVI/BEPPE 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W <b>90W</b>	<b>11610m</b>	100-240V 50/60 Hz	6500K/4000K/3000K	VIVI-BEPPE 500 HQI-SON <b>150W</b>

VIVI/BEPPE 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	<b>50W</b>	<b>6550 lm</b>	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON <b>70W</b>
	<b>60W</b>	<b>7600 lm</b>	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON <b>100W</b>

## GX53 LED

LAMP INCLUDED:  
9x GX53 LED


50W  
60W  
9x10W  
90W



NEW VERSION  
CCT SETTABLE LAMP

## VIVI 500

4000K V60.000.H1L  
3000K V60.000.H1R  
4000K V60.000.W1L  
3000K V60.000.W1R  
CCT SET V60.000.D9K

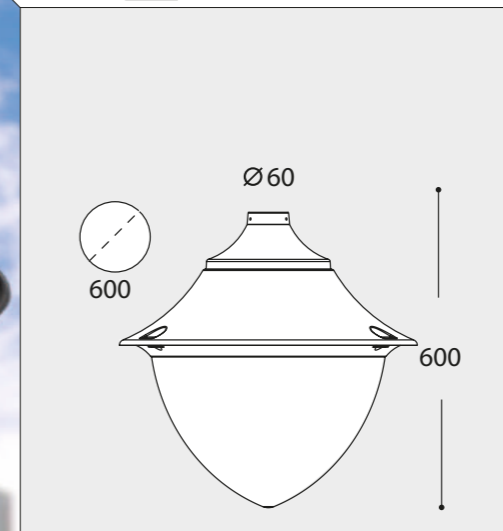

## HIGH POWER LED

LAMP INCLUDED:  
HIGH POWER LED E27



## GX53 LED

LAMP INCLUDED:  
9x GX53 LED


50W  
60W  
9x10W  
90W



NEW VERSION  
CCT SETTABLE LAMP

## BEPPE 500

4000K P60.000.H1L  
3000K P60.000.H1R  
4000K P60.000.W1L  
3000K P60.000.W1R  
CCT SET P60.000.D9K

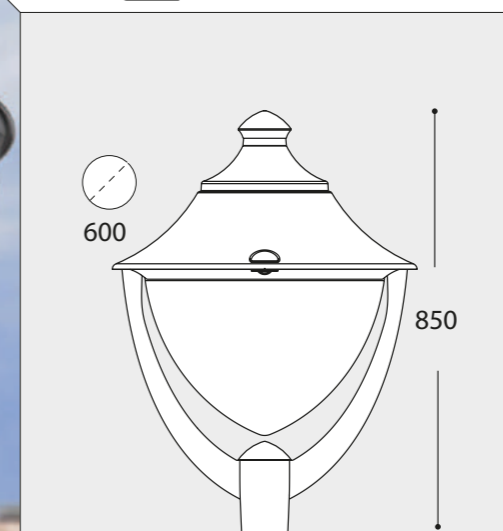

## HIGH POWER LED

LAMP INCLUDED:  
HIGH POWER LED E27



MADE IN ITALY

# ECOVIVI/ECOBEPPE 500

MODERN RANGE



MADE IN ITALY



**CCT SETTABLE**

3000 K 4000 K 6500 K


SDCM <6

**GX53 MODULAR LED LIGHT SYSTEM**

- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

**AVAILABLE COLORS**

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)



ECOVIVI/ECOBEPPE 500 90W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W <b>90W</b>	<b>11610 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI - ECOBEPPE 500 = <b>150W</b> HQI-SON

**GX53 LED**  
LAMP INCLUDED:  
9x GX53 LED

**ECOVIVI 500** E27

E27 EV6.000.E27

E40 EV6.000.E40

9x10W **90W** **CCT SET** EV6.000.D9K

**NEW VERSION CCT SETTABLE LAMP**

E27 VERSION  
SUITABLE FOR  
HQI - SON

**GX53 LED**  
LAMP INCLUDED:  
9x GX53 LED

**ECOBEPPE 500** E27

E27 EP6.000.E27

E40 EP6.000.E40

9x10W **90W** **CCT SET** EP6.000.D9K


**NEW VERSION CCT SETTABLE LAMP**

E27 VERSION  
SUITABLE FOR  
HQI - SON

MADE IN ITALY

# GINO/REMO 500

MODERN RANGE

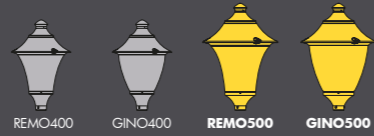

MADE IN ITALY



**NEW VERSION**  
HIGH POWER LED

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C  
-30°C

90% HUMIDITY


VOLTAGE SURGE RESISTANT

50W (6550 lm)  
60W (7600 lm)

More details at page 59



RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



GINO/REMO 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K	GINO-REMO 500 HQI-SON 148W

GINO/REMO 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 70W
	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 100W

## GX53 LED


LAMP INCLUDED:  
9x GX53 LED



NEW VERSION  
CCT SETTABLE LAMP

## GINO 500

50W	4000K	F60.000.H1L
3000K	F60.000.H1R	
60W	4000K	F60.000.W1L
3000K	F60.000.W1R	
9x10W 90W	CCT SET	F60.000.D9K

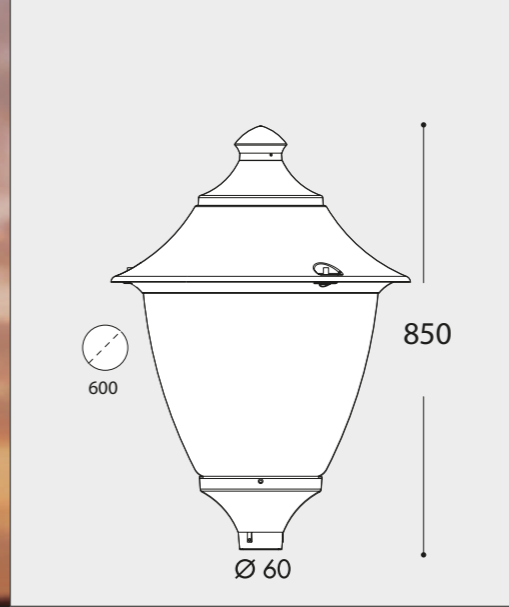

## HIGH POWER LED

LAMP INCLUDED:  
HIGH POWER LED E27



## GX53 LED


LAMP INCLUDED:  
9x GX53 LED



NEW VERSION  
CCT SETTABLE LAMP

## REMO 500

50W	4000K	R60.000.H1L
3000K	R60.000.H1R	
60W	4000K	R60.000.W1L
3000K	R60.000.W1R	
9x10W 90W	CCT SET	R60.000.D9K

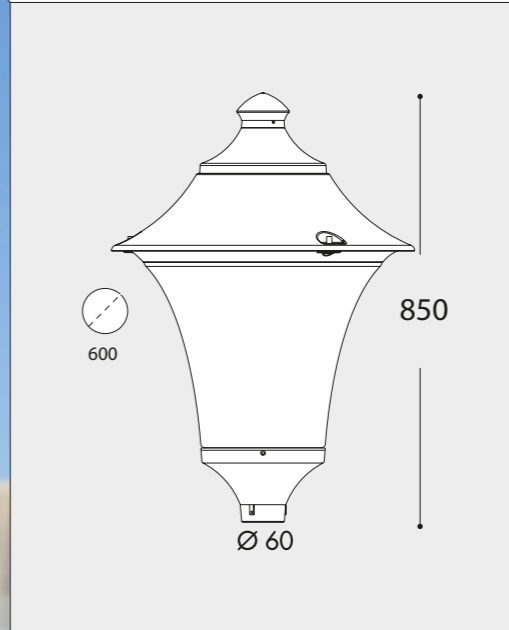

## HIGH POWER LED

LAMP INCLUDED:  
HIGH POWER LED E27



MADE IN ITALY



# GLOBE 400/GLOBE 500

MODERN RANGE



MADE IN ITALY



AVAILABLE COLORS					
RESIN BODY (MOULDED COLOURS)			DIFFUSER		
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



## GLOBE 400



<b>E27</b>	G41.B40.E27
------------	-------------

**ALUMINIUM CHROME LOUVRE**

UPWARD .FC1  
DOWNWARD .FC6

## GLOBE 500



<b>E27</b>	G51.B50.E27
<b>E40</b>	G51.B50.E40

**ALUMINIUM CHROME LOUVRE**

UPWARD .FC1  
DOWNWARD .FC6

E27 VERSION  
SUITABLE FOR  
HQI - SON


MADE IN ITALY

# MODERN POLES






EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION


EKTOR 2500		EKTOR 3000		AKILLE 3000		EKTOR 3500		AKILLE 3500		
without door	000.361	without door	000.364	000.414	without door	000.367	000.417	without door	000.367	000.417
with door	000.362	with door	000.365	000.415	with door	000.368	000.418	with door	000.368	000.418
with door & box	000.363	with door & box	000.366	000.416	with door & box	000.369	000.419	with door & box	000.369	000.419

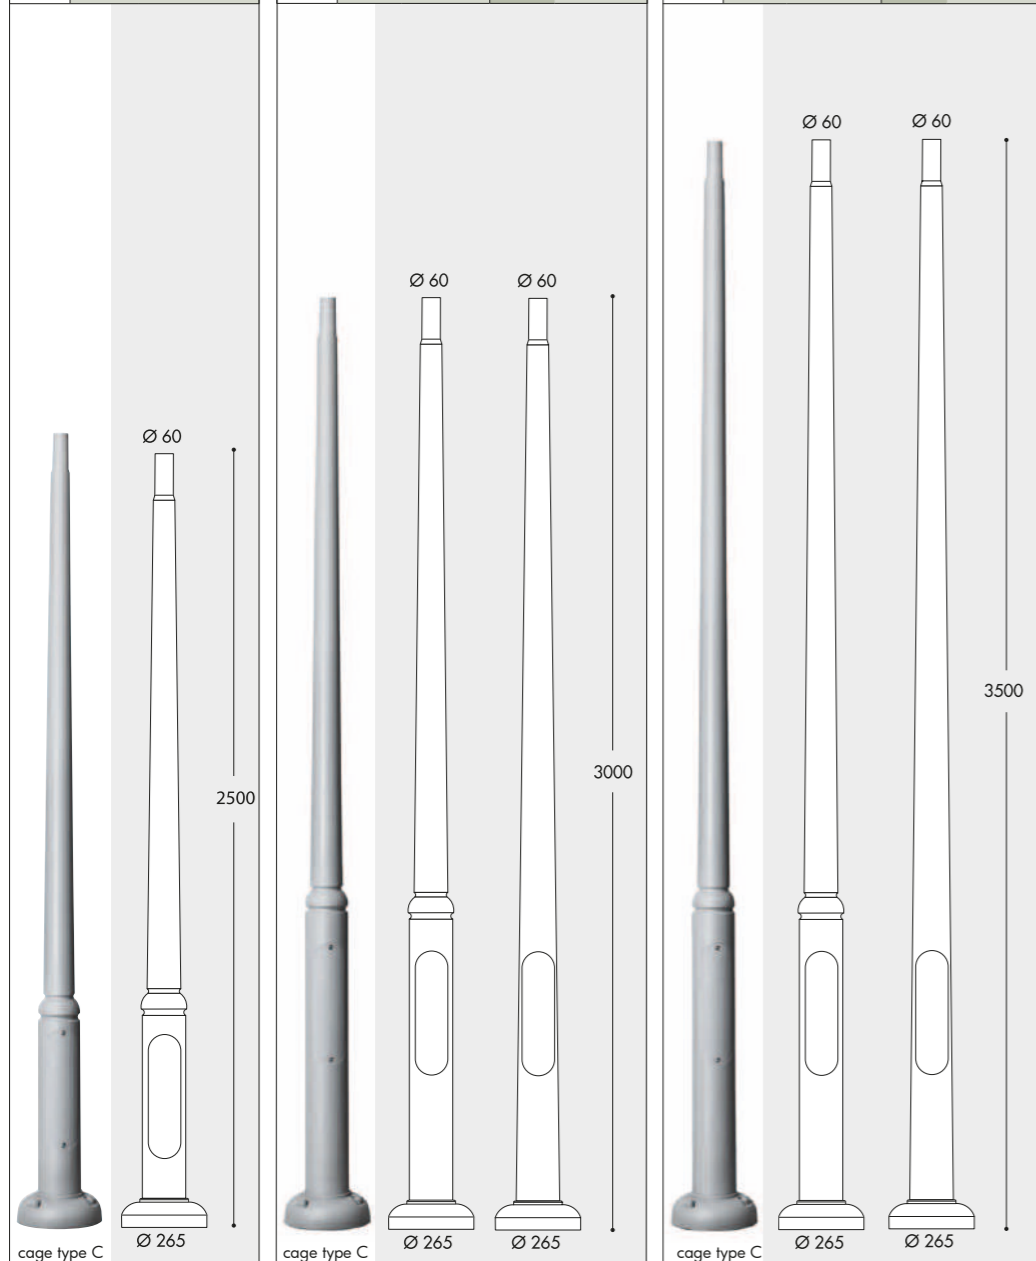


EKTOR 4000		AKILLE 4000	
without door	000.371	000.421	
with door	000.372	000.422	
with door & box	000.373	000.423	

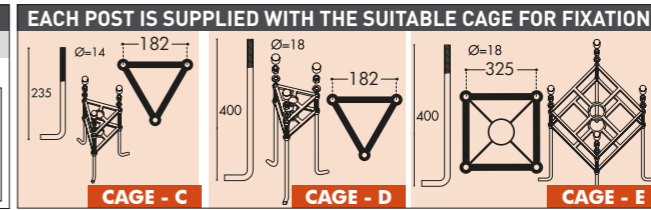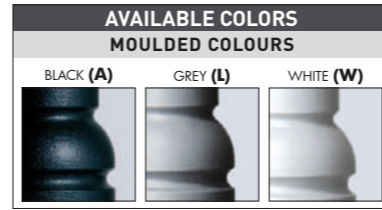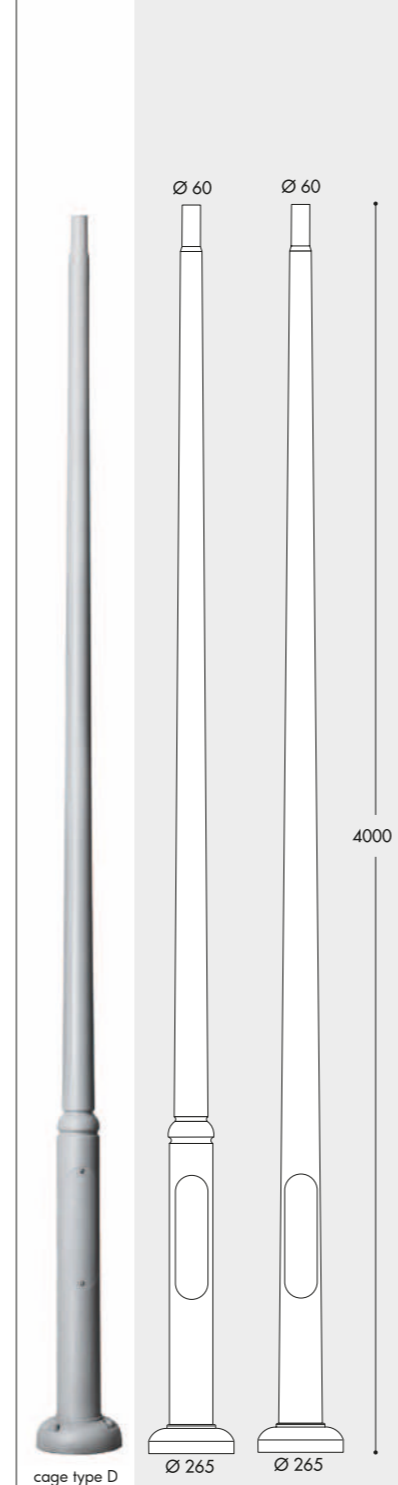


EKTOR 4500		AKILLE 4500	
without door	000.374	000.424	
with door	000.375	000.425	
with door & box	000.376	000.426	

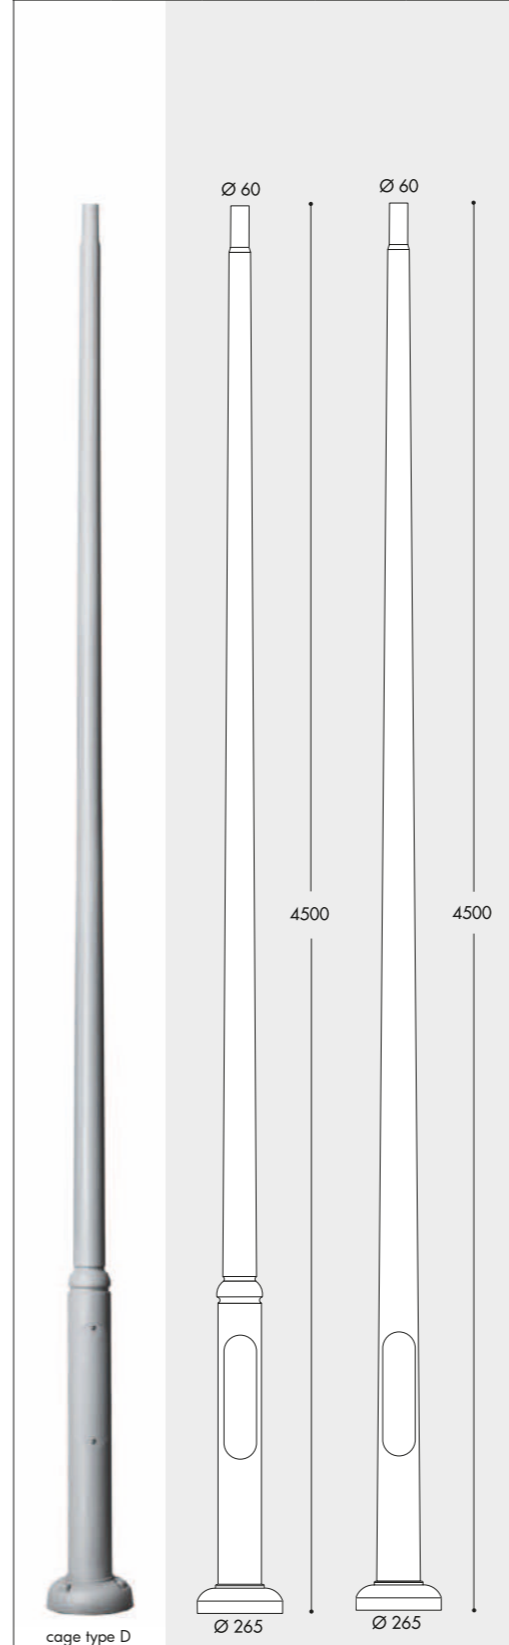

EKTOR 5000		AKILLE 5000	
without door	000.377	000.427	
with door	000.378	000.428	
with door & box	000.379	000.429	

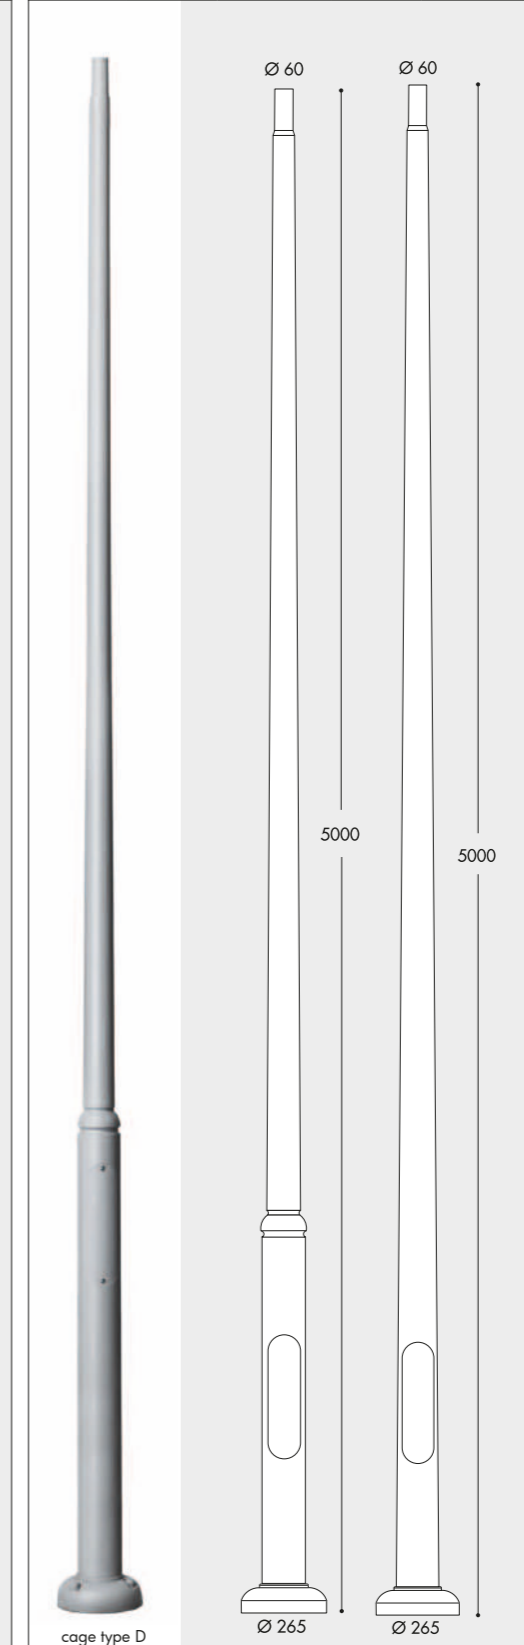


EKTOR 6000	
without door	000.384
with door	000.385
with door & box	000.386

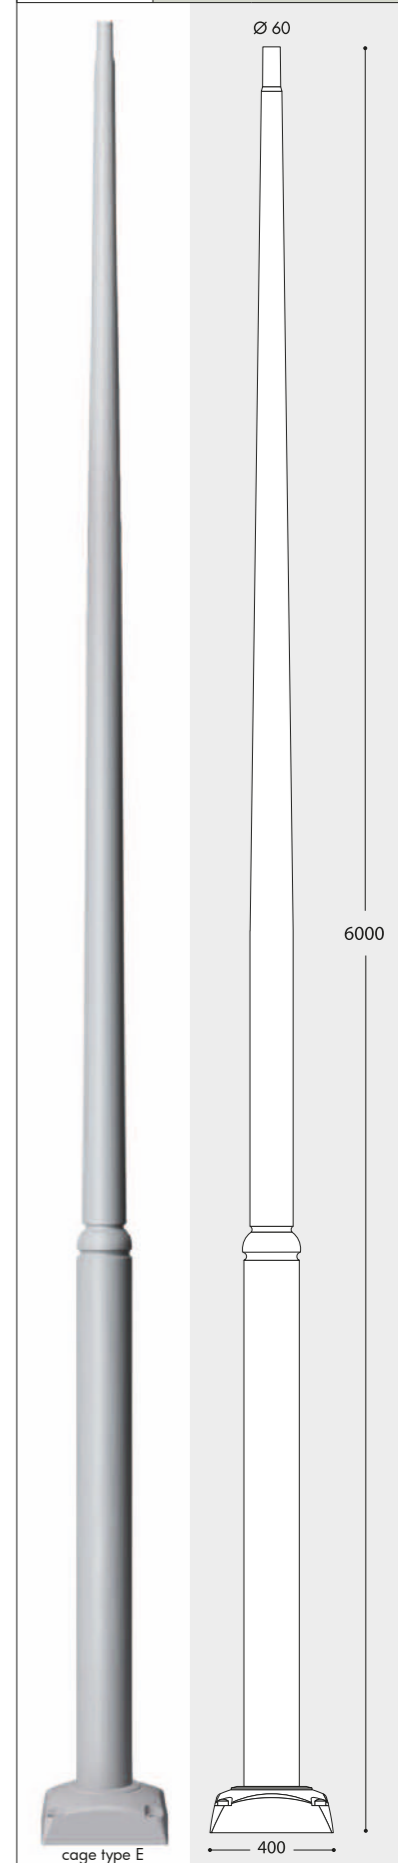

## MIDIPILAR WALL BRACKET


H.254.WAL

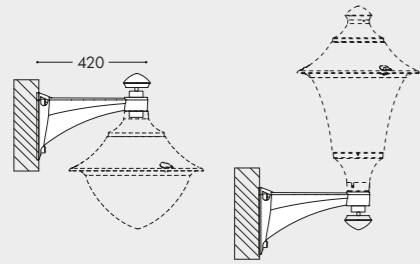

suitable for:  
GINO 400 - REMO400  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## MIDIPILAR SYSTEM 1L

000.000.A10




Ø60

suitable for:  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## MIDIPILAR SYSTEM 2L

000.000.A20




Ø60

suitable for:  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## MIDIPILAR SYSTEM 3L

000.000.A30




Ø60

suitable for:  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## PILAR WALL BRACKET


H.253.WAL

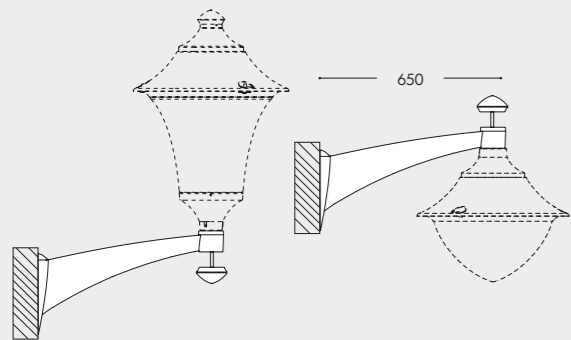

suitable for:  
GINO 500 - REMO 500  
VIVI 500 - ECOVIVI 500  
BEPPE 500 - GLOBE 500

## PILAR SYSTEM 1L

000.000.P10




Ø60

suitable for:  
VIVI 500 - ECOVIVI 500  
GLOBE 500

## PILAR SYSTEM 2L

000.000.P20

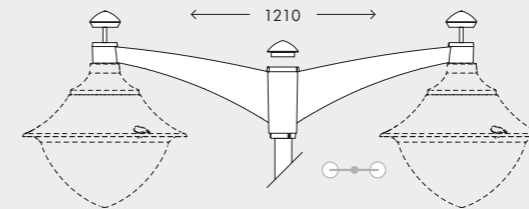

Ø60

suitable for:  
VIVI 500 - ECOVIVI 500  
GLOBE 500


## NEW LOT BASE

Ø60



suitable for:  
GINO 400 - REMO400  
VIVI 400 - ECOVIVI 400  
BEPPE 400 - ECOBEPPE 400  
GLOBE 400 - GINO 500  
REMO500 - VIVI 500  
ECOVIVI 500 - GLOBE 500

H.115



Ø 60mm

### FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

# LUIGI HIGH-BAY

MODERN RANGE



MADE IN ITALY



**CCT SETTABLE**

3000 K 4000 K 6500 K

SDCM <6

**GX53 MODULAR LED LIGHT SYSTEM**



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

**NEW HIGH POWER LED**

**INDOOR & OUTDOOR USE**

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

**50W** (6550 lm)  
**60W** (7600 lm)

More details at page 59



AVAILABLE COLORS			DIFFUSER	
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)




HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 100	<b>30W</b>	<b>3620 lm</b>	100-240V 50/60 Hz	4000K/3000K <b>CCT SET</b>	= <b>50W</b> HQI-SON
E27 HIGH POWER LED Ø 118	<b>50W</b>	<b>6550 lm</b>	100-240V 50/60 Hz	4000K 3000K	= <b>70W</b> HQI-SON
E27 HIGH POWER LED Ø 138	<b>60W</b>	<b>7600 lm</b>	100-240V 50/60 Hz	4000K 3000K	= <b>100W</b> HQI-SON

GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Ø TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	<b>6x10W 60W</b>	<b>7740 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	= <b>100W</b> HQI-SON
GX53	<b>9x10W 90W</b>	<b>11610 lm</b>	100-240V 50/60 Hz	6500K/4000K/3000K	= <b>150W</b> HQI-SON


**LUIGI 500-DR HIGH POWER LED**



- 50W LED** 4000K L51.128.H1L  
**3000K** L51.128.H1R
- 60W LED** 4000K L51.128.W1L  
**3000K** L51.128.W1R

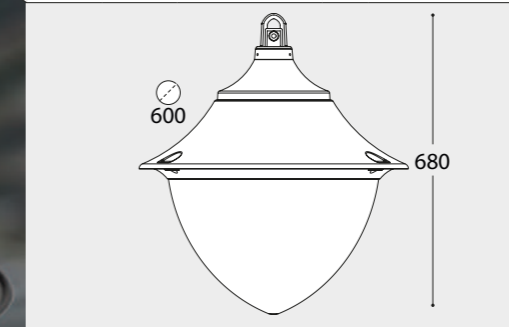

9x10W **CCT SET** L5F.128.D9K

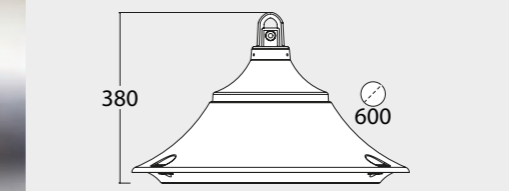

**LUIGI 500 GX53 LED**




**NEW VERSION CCT SETTABLE LAMP**


**LUIGI 400-DR HIGH POWER LED**




- 30W LED** **CCT SET** L41.128.Q1K
- 50W LED** 4000K L41.128.H1L  
**3000K** L41.128.H1R

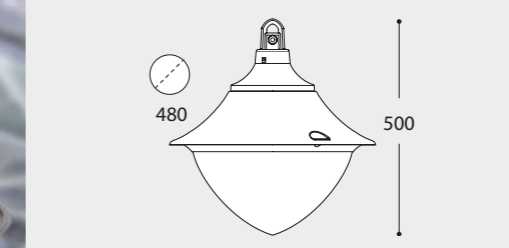

6x10W **CCT SET** L4F.128.D6K

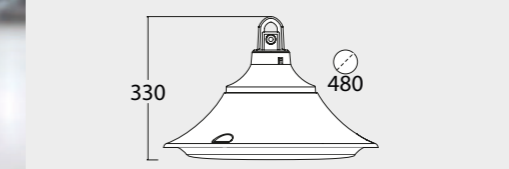

**LUIGI 400 GX53 LED**

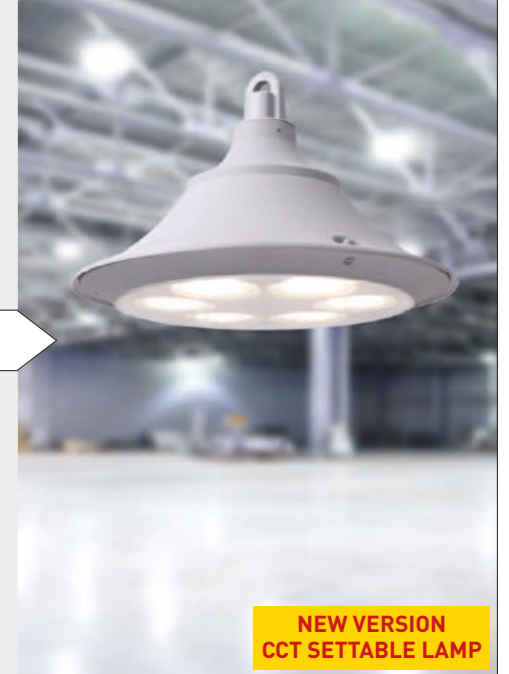

**NEW VERSION CCT SETTABLE LAMP**

MADE IN ITALY

G9LED																																					
	<table border="1"> <tr> <td>POWER</td> <td colspan="2"><b>1,7 W</b></td> </tr> <tr> <td rowspan="2">LUMINOUS FLUX (Φ TOTAL)</td> <td>3000 K</td> <td>150 lm</td> </tr> <tr> <td>4000 K</td> <td>150 lm</td> </tr> </table>	POWER	<b>1,7 W</b>		LUMINOUS FLUX (Φ TOTAL)	3000 K	150 lm	4000 K	150 lm																												
	POWER	<b>1,7 W</b>																																			
LUMINOUS FLUX (Φ TOTAL)	3000 K	150 lm																																			
	4000 K	150 lm																																			
	<table border="1"> <tr> <td>VOLTAGE</td> <td colspan="2">100-240 V</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="2">50/60 Hz</td> </tr> <tr> <td>PSTLM (NO FLICKER)</td> <td colspan="2">&lt;1</td> </tr> <tr> <td>SVM</td> <td colspan="2">0,9</td> </tr> <tr> <td>CRI</td> <td colspan="2">&gt; 80</td> </tr> <tr> <td>SDCM</td> <td colspan="2">&lt;6</td> </tr> <tr> <td>SWITCHING CYCLE</td> <td colspan="2">&gt;40.000</td> </tr> <tr> <td>WARM UP TIME</td> <td colspan="2">≤ 0,5"</td> </tr> <tr> <td>LIFETIME</td> <td colspan="2">15.000 h</td> </tr> <tr> <td>KELVIN</td> <td>3000 K</td> <td>4000 K</td> </tr> <tr> <td>EFFICIENCY CLASS</td> <td>F</td> <td>F</td> </tr> <tr> <td>REF. CODE</td> <td>H.LED.G09.3K</td> <td>H.LED.G09.4K</td> </tr> </table>	VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		PSTLM (NO FLICKER)	<1		SVM	0,9		CRI	> 80		SDCM	<6		SWITCHING CYCLE	>40.000		WARM UP TIME	≤ 0,5"		LIFETIME	15.000 h		KELVIN	3000 K	4000 K	EFFICIENCY CLASS	F	F	REF. CODE	H.LED.G09.3K	H.LED.G09.4K
VOLTAGE	100-240 V																																				
FREQUENCY	50/60 Hz																																				
PSTLM (NO FLICKER)	<1																																				
SVM	0,9																																				
CRI	> 80																																				
SDCM	<6																																				
SWITCHING CYCLE	>40.000																																				
WARM UP TIME	≤ 0,5"																																				
LIFETIME	15.000 h																																				
KELVIN	3000 K	4000 K																																			
EFFICIENCY CLASS	F	F																																			
REF. CODE	H.LED.G09.3K	H.LED.G09.4K																																			

R7s LED 78mm- CCT SETTABLE																																															
	<table border="1"> <tr> <td>POWER</td> <td colspan="2"><b>3,5W</b></td> </tr> <tr> <td rowspan="3">LUMINOUS FLUX (Φ TOTAL)</td> <td>2700 K</td> <td>325 lm</td> </tr> <tr> <td>4000 K</td> <td>365 lm</td> </tr> <tr> <td>6500 K</td> <td>365 lm</td> </tr> <tr> <td>VOLTAGE</td> <td colspan="2">100-240 V</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="2">50/60 Hz</td> </tr> <tr> <td>DISPLACEMENT FACTOR</td> <td colspan="2">&gt;0</td> </tr> <tr> <td>PSTLM (NO FLICKER)</td> <td colspan="2">&lt;1</td> </tr> <tr> <td>SVM</td> <td colspan="2">0,4</td> </tr> <tr> <td>CRI</td> <td colspan="2">&gt; 80</td> </tr> <tr> <td>SDCM</td> <td colspan="2">&lt;6</td> </tr> <tr> <td>SWITCHING CYCLE</td> <td colspan="2">45.000</td> </tr> <tr> <td>WARM UP TIME</td> <td colspan="2">≤ 0,5"</td> </tr> <tr> <td>LIFETIME</td> <td colspan="2">25.000 h</td> </tr> <tr> <td>EFFICIENCY CLASS</td> <td colspan="2">F</td> </tr> <tr> <td>REF. CODE</td> <td colspan="2">H7.LED.R7S.CCT</td> </tr> </table>	POWER	<b>3,5W</b>		LUMINOUS FLUX (Φ TOTAL)	2700 K	325 lm	4000 K	365 lm	6500 K	365 lm	VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		DISPLACEMENT FACTOR	>0		PSTLM (NO FLICKER)	<1		SVM	0,4		CRI	> 80		SDCM	<6		SWITCHING CYCLE	45.000		WARM UP TIME	≤ 0,5"		LIFETIME	25.000 h		EFFICIENCY CLASS	F		REF. CODE	H7.LED.R7S.CCT	
POWER	<b>3,5W</b>																																														
LUMINOUS FLUX (Φ TOTAL)	2700 K	325 lm																																													
	4000 K	365 lm																																													
	6500 K	365 lm																																													
VOLTAGE	100-240 V																																														
FREQUENCY	50/60 Hz																																														
DISPLACEMENT FACTOR	>0																																														
PSTLM (NO FLICKER)	<1																																														
SVM	0,4																																														
CRI	> 80																																														
SDCM	<6																																														
SWITCHING CYCLE	45.000																																														
WARM UP TIME	≤ 0,5"																																														
LIFETIME	25.000 h																																														
EFFICIENCY CLASS	F																																														
REF. CODE	H7.LED.R7S.CCT																																														

GU10 LED - CCT SETTABLE																																									
	<table border="1"> <tr> <td>POWER</td> <td></td> <td><b>3,5 W</b></td> <td><b>6 W</b></td> </tr> <tr> <td rowspan="2">LUMINOUS FLUX (Φ TOTAL)</td> <td>2700 K</td> <td>329 lm</td> <td>562 lm</td> </tr> <tr> <td>4000 K</td> <td>366 lm</td> <td>615 lm</td> </tr> </table>	POWER		<b>3,5 W</b>	<b>6 W</b>	LUMINOUS FLUX (Φ TOTAL)	2700 K	329 lm	562 lm	4000 K	366 lm	615 lm																													
	POWER		<b>3,5 W</b>	<b>6 W</b>																																					
LUMINOUS FLUX (Φ TOTAL)	2700 K	329 lm	562 lm																																						
	4000 K	366 lm	615 lm																																						
	<table border="1"> <tr> <td>VOLTAGE</td> <td colspan="2">100-240 V</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="2">50/60 Hz</td> </tr> <tr> <td>DISPLACEMENT FACTOR</td> <td colspan="2">&gt;0</td> </tr> <tr> <td>PSTLM (NO FLICKER)</td> <td colspan="2">&lt;1</td> </tr> <tr> <td>SVM</td> <td colspan="2">0,4</td> </tr> <tr> <td>CRI</td> <td colspan="2">&gt; 80</td> </tr> <tr> <td>SDCM</td> <td colspan="2">&lt;3</td> </tr> <tr> <td>BEAM ANGLE</td> <td>43°</td> <td>45°</td> </tr> <tr> <td>SWITCHING CYCLE</td> <td>&gt; 25.000</td> <td>&gt; 25.000</td> </tr> <tr> <td>WARM UP TIME</td> <td colspan="2">≤ 0,5"</td> </tr> <tr> <td>LIFETIME</td> <td colspan="2">25.000 h</td> </tr> <tr> <td>EFFICIENCY CLASS</td> <td colspan="2">F</td> </tr> <tr> <td>REF. CODE</td> <td colspan="2">H.LED.GU10.CCT</td> </tr> </table>	VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		DISPLACEMENT FACTOR	>0		PSTLM (NO FLICKER)	<1		SVM	0,4		CRI	> 80		SDCM	<3		BEAM ANGLE	43°	45°	SWITCHING CYCLE	> 25.000	> 25.000	WARM UP TIME	≤ 0,5"		LIFETIME	25.000 h		EFFICIENCY CLASS	F		REF. CODE	H.LED.GU10.CCT		
VOLTAGE	100-240 V																																								
FREQUENCY	50/60 Hz																																								
DISPLACEMENT FACTOR	>0																																								
PSTLM (NO FLICKER)	<1																																								
SVM	0,4																																								
CRI	> 80																																								
SDCM	<3																																								
BEAM ANGLE	43°	45°																																							
SWITCHING CYCLE	> 25.000	> 25.000																																							
WARM UP TIME	≤ 0,5"																																								
LIFETIME	25.000 h																																								
EFFICIENCY CLASS	F																																								
REF. CODE	H.LED.GU10.CCT																																								

R7s LED 118mm- CCT SETTABLE																																															
	<table border="1"> <tr> <td>POWER</td> <td colspan="2"><b>7,5 W</b></td> </tr> <tr> <td rowspan="3">LUMINOUS FLUX (Φ TOTAL)</td> <td>2700 K</td> <td>680 lm</td> </tr> <tr> <td>4000 K</td> <td>775 lm</td> </tr> <tr> <td>6500 K</td> <td>790 lm</td> </tr> <tr> <td>VOLTAGE</td> <td colspan="2">100-240 V</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="2">50/60 Hz</td> </tr> <tr> <td>DISPLACEMENT FACTOR</td> <td colspan="2">&gt;0,5</td> </tr> <tr> <td>PSTLM (NO FLICKER)</td> <td colspan="2">&lt;1</td> </tr> <tr> <td>SVM</td> <td colspan="2">0,4</td> </tr> <tr> <td>CRI</td> <td colspan="2">&gt; 80</td> </tr> <tr> <td>SDCM</td> <td colspan="2">&lt;6</td> </tr> <tr> <td>SWITCHING CYCLE</td> <td colspan="2">45.000</td> </tr> <tr> <td>WARM UP TIME</td> <td colspan="2">≤ 0,5"</td> </tr> <tr> <td>LIFETIME</td> <td colspan="2">25.000 h</td> </tr> <tr> <td>EFFICIENCY CLASS</td> <td colspan="2">F</td> </tr> <tr> <td>REF. CODE</td> <td colspan="2">H8.LED.R7S.CCT</td> </tr> </table>	POWER	<b>7,5 W</b>		LUMINOUS FLUX (Φ TOTAL)	2700 K	680 lm	4000 K	775 lm	6500 K	790 lm	VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		DISPLACEMENT FACTOR	>0,5		PSTLM (NO FLICKER)	<1		SVM	0,4		CRI	> 80		SDCM	<6		SWITCHING CYCLE	45.000		WARM UP TIME	≤ 0,5"		LIFETIME	25.000 h		EFFICIENCY CLASS	F		REF. CODE	H8.LED.R7S.CCT	
POWER	<b>7,5 W</b>																																														
LUMINOUS FLUX (Φ TOTAL)	2700 K	680 lm																																													
	4000 K	775 lm																																													
	6500 K	790 lm																																													
VOLTAGE	100-240 V																																														
FREQUENCY	50/60 Hz																																														
DISPLACEMENT FACTOR	>0,5																																														
PSTLM (NO FLICKER)	<1																																														
SVM	0,4																																														
CRI	> 80																																														
SDCM	<6																																														
SWITCHING CYCLE	45.000																																														
WARM UP TIME	≤ 0,5"																																														
LIFETIME	25.000 h																																														
EFFICIENCY CLASS	F																																														
REF. CODE	H8.LED.R7S.CCT																																														

R7s LED 189mm- CCT SETTABLE																																															
	<table border="1"> <tr> <td>POWER</td> <td colspan="2"><b>10,5 W</b></td> </tr> <tr> <td rowspan="3">LUMINOUS FLUX (Φ TOTAL)</td> <td>2700 K</td> <td>1000 lm</td> </tr> <tr> <td>4000 K</td> <td>1130 lm</td> </tr> <tr> <td>6500 K</td> <td>1060 lm</td> </tr> <tr> <td>VOLTAGE</td> <td colspan="2">100-240 V</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="2">50/60 Hz</td> </tr> <tr> <td>DISPLACEMENT FACTOR</td> <td colspan="2">&gt;0,7</td> </tr> <tr> <td>PSTLM (NO FLICKER)</td> <td colspan="2">&lt;1</td> </tr> <tr> <td>SVM</td> <td colspan="2">0,4</td> </tr> <tr> <td>CRI</td> <td colspan="2">&gt; 80</td> </tr> <tr> <td>SDCM</td> <td colspan="2">&lt;6</td> </tr> <tr> <td>SWITCHING CYCLE</td> <td colspan="2">45.000</td> </tr> <tr> <td>WARM UP TIME</td> <td colspan="2">≤ 0,5"</td> </tr> <tr> <td>LIFETIME</td> <td colspan="2">25.000 h</td> </tr> <tr> <td>EFFICIENCY CLASS</td> <td colspan="2">F</td> </tr> <tr> <td>REF. CODE</td> <td colspan="2">H9.LED.R7S.CCT</td> </tr> </table>	POWER	<b>10,5 W</b>		LUMINOUS FLUX (Φ TOTAL)	2700 K	1000 lm	4000 K	1130 lm	6500 K	1060 lm	VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		DISPLACEMENT FACTOR	>0,7		PSTLM (NO FLICKER)	<1		SVM	0,4		CRI	> 80		SDCM	<6		SWITCHING CYCLE	45.000		WARM UP TIME	≤ 0,5"		LIFETIME	25.000 h		EFFICIENCY CLASS	F		REF. CODE	H9.LED.R7S.CCT	
POWER	<b>10,5 W</b>																																														
LUMINOUS FLUX (Φ TOTAL)	2700 K	1000 lm																																													
	4000 K	1130 lm																																													
	6500 K	1060 lm																																													
VOLTAGE	100-240 V																																														
FREQUENCY	50/60 Hz																																														
DISPLACEMENT FACTOR	>0,7																																														
PSTLM (NO FLICKER)	<1																																														
SVM	0,4																																														
CRI	> 80																																														
SDCM	<6																																														
SWITCHING CYCLE	45.000																																														
WARM UP TIME	≤ 0,5"																																														
LIFETIME	25.000 h																																														
EFFICIENCY CLASS	F																																														
REF. CODE	H9.LED.R7S.CCT																																														

## E27 LED A60- CCT SETTABLE



POWER		8,5 W	11 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	840 lm	1100 lm
	4000 K	920 lm	1200 lm
	6500 K	920 lm	1200 lm
SIZE & SOCKET			
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,5	>0,7
PSTLM (NO FLICKER)		< 1	< 1
SVM		< 0,4	< 0,4
CRI		> 80	> 80
SDCM		<6	<6
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	F
REF. CODE		H.LED.A60.CCT	H2.LED.A60.CCT

**CCT SETTABLE**  
2700 K 4000 K 6500 K  
SDCM <6

**ENERGY**  
FUMAGALLI S.R.L.  
H.LED.A60.CCT  
A B C D E F G

**TUV SUD**

**CE CB** LVD EMC ERP

**IECEE CB CERTIFICATE:**  
SG PSB-LE-03297

**INDOOR & OUTDOOR USE**  
-30 +80 °C 90% HUMIDITY  
VOLTAGE SURGE RESISTANT

COMPLY WITH:  
EU 2019/2015  
EU 2019/2020

9 kWh/1000h

## E27 HIGH POWER LED



POWER		15 W	30W
LUMINOUS FLUX (Φ TOTAL)	3000 K	1545 lm	3325lm
	4000 K	1690 lm	3620 lm
SIZE & SOCKET			
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,7	>0,9
PSTLM (NO FLICKER)		<1	<1
SVM		0,4	0,4
CRI		> 80	> 80
SWITCHING CYCLE		30.000	30.000
WARM UP TIME		< 0,5"	< 1"
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	E
REF. CODE		H3.LED.HIP.CCT	H2.LED.HIP.CCT

**CCT SETTABLE**  
3000 K 4000 K  
SDCM <6

**SILICONE PROTECTION DRIVER**

**INDOOR & OUTDOOR USE**  
-30 +80 °C 90% HUMIDITY  
VOLTAGE SURGE RESISTANT

**ENERGY**  
FUMAGALLI S.R.L.  
H3.LED.HIP.CCT  
A B C D E F G

**TUV SUD**

**CE CB** LVD EMC ERP

**IECEE CB CERTIFICATE:**  
SG PSB-LE-03835

30 kWh/1000h

COMPLY WITH:  
EU 2019/2015  
EU 2019/2020

**IECEE CB CERTIFICATE:**  
SG PSB-LE-03834

**NEW VERSION CCT SETTABLE LAMP**

## E27 LED FILAMENT A60



POWER		6,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	800 lm
SIZE & SOCKET		
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
CRI		> 80
SWITCHING CYCLE		>100.000
WARM UP TIME		≤ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H.LED.FIL.3K

**ENERGY**  
FUMAGALLI S.R.L.  
H.LED.FIL.3K(V3)  
A B C D E F G

**TUV SUD**

**CE CB** LVD EMC ERP

**IECEE CB CERTIFICATE:**  
SG PSB-LE-03735

**INDOOR & OUTDOOR USE**  
-30 +80 °C 90% HUMIDITY  
VOLTAGE SURGE RESISTANT

COMPLY WITH:  
EU 2019/2015  
EU 2019/2020

7 kWh/1000h

90% savings =60W

## E27 HIGH POWER LED



POWER		50 W	60W
LUMINOUS FLUX (Φ TOTAL)	3000 K	5850 lm	6600 lm
	4000 K	6550 lm	7600 lm
SIZE & SOCKET			
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,9	>0,9
PSTLM (NO FLICKER)		<1	<1
SVM		0,4	0,4
CRI		> 80	> 80
SWITCHING CYCLE		30.000	30.000
WARM UP TIME		< 1"	< 0,5"
LIFETIME		25.000 h	25.000 h
KELVIN		3000 K 4000 K	3000 K 4000 K
EFFICIENCY CLASS		E E	E E
REF. CODE		H.LED.HIP.3K H.LED.HIP.4K	H4.LED.HIP.3K H4.LED.HIP.4K

**SILICONE PROTECTION DRIVER**

**INDOOR & OUTDOOR USE**  
-30 +80 °C 90% HUMIDITY  
VOLTAGE SURGE RESISTANT

**ENERGY**  
FUMAGALLI S.R.L.  
H4.LED.HIP.3K(V3)  
A B C D E F G

**TUV SUD**

**CE CB** LVD EMC ERP

**IECEE CB CERTIFICATE:**  
SG PSB-LE-03791

50 kWh/1000h

COMPLY WITH:  
EU 2019/2015  
EU 2019/2020

**IECEE CB CERTIFICATE:**  
SG PSB-LE-03799

## GX53 LED Ø75mm- CCT SETTABLE

	POWER	<b>3 W</b>	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	405 lm
		4000 K	410 lm
	6500 K	410 lm	
SIZE & SOCKET			
	GX53		
<p><b>CCT SETTABLE</b></p> <p>3000 K 4000 K 6500 K</p> <p>SDCM &lt;6</p> <p><b>ENERG+</b></p> <p>FUMAGALLI S.R.L. H3.LED.G53.CCT</p> <p>A B C D E F G</p> <p>3 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p><b>CE CB</b></p> <p>LVD EMC ERP</p> <p><b>IECEE</b></p> <p>IECEE CB CERTIFICATE: SG PSB-LE-03887</p>	LUMINOUS FLUX (Φ USE 120°)	335 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	BEAM ANGLE	112°	
	SWITCHING CYCLE	> 30.000	
	WARM UP TIME	0s	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	E	
	REF. CODE	H.LED.G53.CCT	

## GX53 LED Ø180mm- CCT SETTABLE

	POWER	<b>7 W</b>	<b>11 W</b>	<b>18 W</b>	
	LUMINOUS FLUX (Φ TOTAL)	2700 K	790 lm	1325 lm	2118 lm
		4000 K	851 lm	1446 lm	2315 lm
	6500 K	887 lm	1470 lm	2340 lm	
SIZE & SOCKET					
	GX53				
<p><b>CCT SETTABLE</b></p> <p>2700 K 4000 K 6500 K</p> <p>SDCM &lt;6</p> <p><b>ENERG+</b></p> <p>FUMAGALLI H6.LED.G53.CCT</p> <p>A B C D E F G</p> <p>7 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p><b>CE CB</b></p> <p>LVD EMC ERP</p> <p><b>IECEE</b></p> <p>IECEE CB CERTIFICATE: SG PSB-LE-03936</p>	LUMINOUS FLUX (Φ USE 120°)	650 lm	1100 lm	1720 lm	
	VOLTAGE	100-240 V	100-240 V	100-240 V	
	FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	>0,7	>0,7	
	PSTLM (NO FLICKER)	<1	<1	<1	
	SVM	0,9	0,9	0,9	
	CRI	> 80	> 80	> 80	
	SDCM	<6	<6	<6	
	BEAM ANGLE (FWHM)	107°	107°	107°	
	SWITCHING CYCLE	> 30.000	> 25.000	> 25.000	
	WARM UP TIME	≤ 0,5"	≤ 0,5"	≤ 0,5"	
	LIFETIME	25.000 h	25.000 h	25.000 h	
	EFFICIENCY CLASS	F	E	E	
REF. CODE	H6.LED.G53.CCT	H4.LED.G53.CCT	H5.LED.G53.CCT		

## GX53 LED Ø100mm - CCT SETTABLE

	POWER	<b>10W</b>	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	1190 lm
		4000 K	1290 lm
	6500 K	1210 lm	
SIZE & SOCKET			
	GX53		
<p><b>CCT SETTABLE</b></p> <p>3000 K 4000 K 6500 K</p> <p>SDCM &lt;6</p> <p><b>ENERG+</b></p> <p>FUMAGALLI S.R.L. H3.LED.G53.CCT</p> <p>A B C D E F G</p> <p>10 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p><b>CE CB</b></p> <p>LVD EMC ERP</p> <p><b>IECEE</b></p> <p>IECEE CB CERTIFICATE: SG PSB-LE-03887</p>	LUMINOUS FLUX (Φ USE 120°)	975 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	
	PSTLM (NO FLICKER)	< 1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	BEAM ANGLE	112°	
	SWITCHING CYCLE	> 30.000	
	WARM UP TIME	0s	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	E	
REF. CODE	H3.LED.G53.CCT		

## SOLAR MODULE - CCT SETTABLE

	SIZE		
			40
			Ø160
SUMMER MODE	LUMEN	42	
	AUTONOMY	25h	
WINTER MODE	LUMEN	20	
	AUTONOMY	46h	
SENSORE MODE	LUMEN	280	
	ACTIVE TIME	25 sec	
	N° Detections	423	
SOLAR PANEL	5V/2W		
	Monocrystalline PET type		
	Antishock material		
CHARGING TIME	6h		
REPLACEABLE BATTERY	LiFePO4 IFR26650 3,3Ah, 3,2V		
	No Risk of explosion		
	Working temperature -10° to +60°C		
	Longer Lifetime		
PIR SENSOR	Detection angle 120°		
	Fields of detection up to 5 mt		
	Active for 25 sec.		
LED	3 CIRCUITS	SMD 3528	
	COLOR RENDERING INDEX RA	> 80	
	SDCM	< 6	
	LIFETIME	30.000 h	
	KELVIN SETTABLE	3000 K / 4000 K / 6500 K	
REF. CODE	H.LED.SOL.CCT		

\* available while stock last

# LOOKING FOR SOMETHING ELSE?

GARDEN RANGE



PROJECT RANGE



# TO SEE OUR COMPLETE COLLECTION


Ask for our NEW **General Catalogue 2023** or visit our website at [www.fumagalli.it](http://www.fumagalli.it)



## FUMAGALLI FACTORY



Assembly and Logistic department upgrade

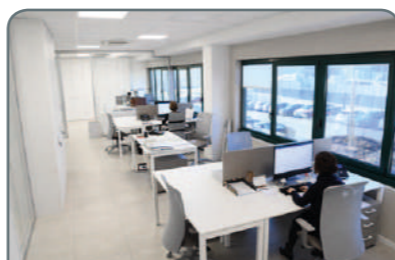

new offices



new exhibition area of 135 sqm



new automated Vertical Warehouse



new warehouse & factory

# RESIN MATERIAL ADVANTAGES



NO MAINTENANCE



ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS




UV-RAY STABILIZED




RECYCLABLE




UV TREATED




DOUBLE INSULATION



ANTI-SHOCK




TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

## HOW TO READ THE CODE

**DIFFUSER**  
IDENTIFIES THE DIFFUSER

**V50**

**STRUCTURE**  
IDENTIFIES THE STRUCTURE ON WHICH THE DIFFUSER IS MOUNTED (POLE, BRACKET, BASE, SPIKE)

**361**

**SYSTEM**  
IDENTIFIES THE MULTILIGHT SYSTEM IF PRESENT

**A20**

**COLOUR OF THE STRUCTURE**  
IDENTIFIES THE COLOUR OF THE STRUCTURE  
A BLACK  
W WHITE  
L GREY

**A**

**COLOUR OF THE DIFFUSER**  
IDENTIFIES THE COLOUR OF THE DIFFUSER  
X CLEAR/FROSTED  
Y OPAL  
Z SMOKED

**X**

**ELECTRIFICATION**  
IDENTIFIES THE TYPE OF ELECTRIFICATION AND THE EVENTUAL PRESENCE OF BULBS

**H1L**



MADE IN  
ITALY



Fumagalli S.r.l.  
Via Ca' Bassa, 29  
21100 Varese - ITALY  
Tel. +39.0332.336353  
Fax. +39.0332.336358  
E-mail [italian.lux@fumagalli.it](mailto:italian.lux@fumagalli.it)



[www.fumagalli.it](http://www.fumagalli.it)